

STANDARD SHQIPTAR

SSH EN 590:2013+A1:2017

**Lëndë djegëse e lëngët për automjete -Gazoil
(Diesel) - Kërkesat dhe metodat e provës**

**Automotive fuels - Diesel - Requirements and
test methods**



DPS Drejtoria e Përgjithshme e Standardizimit

Adresa: Rruga "Mine Peza", 143/3, 1014 Tiranë – Shqipëri,

Kutia Postare: 98,

Tel: + 355 (0) 4 222 62 55; Fax: + 355 (0) 4 224 71 77

E-mail: info@dps.gov.al

© DPS

Riprodhimi është i ndaluar. E drejta ekskluzive për publikimin dhe shitjen e Standardeve Shqiptare i takon DPS.

Hyrje

Drejtoria e Përgjithshme e Standardizimit, DPS, është Organi Kombëtar i Standardizimit në Republikën e Shqipërisë.

DPS harton, miraton dhe publikon standardet puro shqiptare, si dhe adopton dhe publikon standardet evropiane dhe ndërkombëtare, duke iu dhënë atyre statusin e Standardeve Shqiptare (SSH). Të njëjtat kompetenca ka edhe për dokumentet e standardizimit. Miratimi formal i tyre bëhet nga Drejtori i Përgjithshëm i DPS.

Standardet Shqiptare hartohen dhe adoptohen nga Komitetet Teknike (KT). Anëtarët e Komiteteve Teknike janë specialistë të subjekteve shtetërore dhe private nga fusha të ndryshme të ekonomisë që angazhohen vullnetarisht në këtë proces.

Standardi EN 590:2013+A1:2017 është hartuar nga KT 19 dhe miratuar nga DPS si standard më 2017-06-15.

Standardi SSH EN 590:2013+A1:2017 botohet për herë të pestë.

Ky standard është i njëjtë me standardin EN 590:2013+A1:2017 dhe riprodhohet me lejen e:

Komitetit Evropian për Standardizimin – CEN,
Avenue Marnix 17
B-1000 Brussels

Të gjitha të drejtat e shpërndarjes së standardeve evropiane dhe ndërkombëtare në çdo lloj forme në të gjithë botën i takojnë CEN, CENELEC, ETSI, ISO, IEC dhe anëtarëve kombëtare. Asnjë nismë për riprodhimin e tyre nuk mund të ndërmerret pa lejen me shkrim më parë të CEN, CENELEC, ISO, IEC dhe ETSI nëpërmjet të licencuarit.



Standardet rishikohen kur është e nevojshme, prandaj është e domosdoshme që përdoruesi të marrë botimin e fundit si dhe amendamentet e tij, nëse ka të tilla.

English Version

Automotive fuels - Diesel - Requirements and test methods

Carburants pour automobiles - Carburants pour
moteur diesel (gazole) - Exigences et méthodes d'essai

Kraftstoffe für Kraftfahrzeuge - Dieseldieselloststoff -
Anforderungen und Prüfverfahren

This European Standard was approved by CEN on 26 July 2013 and includes Amendment 1 approved by CEN on 17 March 2017.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

	Page
European foreword.....	3
1 Scope.....	5
2 Normative references.....	5
3 Sampling.....	7
4 Pump marking.....	7
5 Requirements and test methods.....	7
5.1 Dyes and markers	7
5.2 Additives.....	7
5.2.1 General.....	7
5.2.2 Methylcyclopentadienyl manganese tricarbonyl (MMT)	7
5.3 Fatty acid methyl ester (FAME).....	8
5.4 Other (bio-) components.....	8
5.5 Generally applicable requirements and related test methods.....	8
5.6 Climate dependent requirements and related test methods	11
5.7 Precision and dispute	12
Annex A (normative) Details of inter-laboratory test programme.....	14
Bibliography.....	15



European foreword

This document (EN 590:2013+A1:2017) has been prepared by Technical Committee CEN/TC 19 "Gaseous and liquid fuels, lubricants and related products of petroleum, synthetic and biological origin", the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2017, and conflicting national standards shall be withdrawn at the latest by November 2017.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes A1 EN 590:2013 A1.

This document includes Amendment 1 approved by CEN on 17 March 2017.

The start and finish of text introduced or altered by amendment is indicated in the text by tags A1 A1.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association [5]

A1 Requirements following amendment 2003/17/EC [2], 2009/30/EC [3], 2011/63/EU [4] and 2014/77/EU [12] to the European Fuels Quality Directive 98/70/EC [1], are taken into account. A1 Dates are included with all normative test method references in order to comply with the requirements of the European Commission; with the accompanying assurance by CEN/TC 19 that any referenced updated versions will always give similar accuracy and the same or better precision (see [4]). A1 The marking at the pump of this product is in line with the requirements of the Fuels Quality Directive and the Alternative Fuels Infrastructure Directive [11]. A1

Significant technical changes between this European Standard and the previous edition are:

- Inclusion of the revised EN 14214 FAME specification.
- Specific requirements concerning the limitation of use of methylcyclopentadienyl manganese tricarbonyl (MMT) as required by the EC have been incorporated.
- Addition of the Fuel Ignition Tester (EN 16144) as an alternate test method to the CFR engine test.
- Addition of Simulated Distillation by gas chromatography (GC), EN ISO 3924, as an alternate test method to distillation by EN ISO 3405.
- Introduction of the improved EDXRF determination technique for low sulfur contents, EN ISO 13032, in replacement of EN ISO 20847.

Annex A is normative and contains the precision data generated on the test methods, which are the result of inter-laboratory testing, carried out by working groups of CEN/TC 19. Many of the test methods included in this standard were the subject of inter-laboratory testing to determine the applicability of the method and its precision in relation to blends of automotive diesel fuel containing 10 % (V/V) or higher of different sources of fatty acid methyl esters (FAME).

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



1 Scope


This European Standard specifies requirements and test methods for marketed and delivered automotive diesel fuel. It is applicable to automotive diesel fuel for use in diesel engine vehicles designed to run on automotive diesel fuel containing up to 7,0 % (V/V) Fatty Acid Methyl Ester.


NOTE For the purposes of this European Standard, the terms “% (m/m)” and “% (V/V)” are used to represent respectively the mass fraction and the volume fraction.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 116:2015, *Diesel and domestic heating fuels - Determination of cold filter plugging point - Stepwise cooling bath method* 


EN 12662:2014, *Liquid petroleum products - Determination of total contamination in middle distillates, diesel fuels and fatty acid methyl esters* 

EN 12916:2016, *Petroleum products - Determination of aromatic hydrocarbon types in middle distillates - High performance liquid chromatography method with refractive index detection* 

EN 14078:2014, *Liquid petroleum products - Determination of fatty acid methyl ester (FAME) content in middle distillates - Infrared spectrometry method* 

EN 14214:2012+A1:2014, *Liquid petroleum products - Fatty acid methyl esters (FAME) for use in diesel engines and heating applications - Requirements and test methods* 


EN 15195:2014, *Liquid petroleum products - Determination of ignition delay and derived cetane number (DCN) of middle distillate fuels by combustion in a constant volume chamber* 

EN 15751:2014, *Automotive fuels - Fatty acid methyl ester (FAME) fuel and blends with diesel fuel - Determination of oxidation stability by accelerated oxidation method* 

EN 16144:2012, *Liquid petroleum products - Determination of ignition delay and derived cetane number (DCN) of middle distillate fuels - Fixed range injection period, constant volume combustion chamber method*

EN 16329:2013, *Diesel and domestic heating fuels - Determination of cold filter plugging point - Linear cooling bath method*

EN 16576:2014, *Automotive fuels - Determination of manganese and iron content in diesel - Inductively coupled plasma optical emission spectrometry (ICP OES) method* 



EN 16715:2015, *Liquid petroleum products - Determination of ignition delay and derived cetane number (DCN) of middle distillate fuels - Ignition delay and combustion delay determination using a constant volume combustion chamber with direct fuel injection* 



EN 16942:2016, *Fuels - Identification of vehicle compatibility - Graphical expression for consumer information* 

EN 23015:1994, *Petroleum products - Determination of cloud point (ISO 3015:1992)*

EN 590:2013+A1:2017 (E)

EN ISO 2160:1998, *Petroleum products - Corrosiveness to copper - Copper strip test (ISO 2160:1998)*



 EN ISO 2719:2016¹, *Determination of flash point - Pensky-Martens closed cup method (ISO 2719:2016)* 

 EN ISO 3104:1996¹, *Petroleum products - Transparent and opaque liquids - Determination of kinematic viscosity and calculation of dynamic viscosity (ISO 3104:1994)* 

EN ISO 3170:2004, *Petroleum liquids - Manual sampling (ISO 3170:2004)*

 EN ISO 3171:1999, *Petroleum liquids - Automatic pipeline sampling (ISO 3171:1988)* 

 EN ISO 3405:2011¹, *Petroleum products - Determination of distillation characteristics at atmospheric pressure (ISO 3405:2011)* 

 EN ISO 3675:1998¹, *Crude petroleum and liquid petroleum products - Laboratory determination of density - Hydrometer method (ISO 3675:1998)* 

 EN ISO 3924:2016, *Petroleum products - Determination of boiling range distribution - Gas chromatography method (ISO 3924:2016)* 



 EN ISO 4259:2006¹, *Petroleum products - Determination and application of precision data in relation to methods of test (ISO 4259:2006)* 

EN ISO 4264:2007², *Petroleum products - Calculation of cetane index of middle-distillate fuels by the four-variable equation (ISO 4264:2007)*

EN ISO 5165:1998¹, *Petroleum products - Determination of the ignition quality of diesel fuels - Cetane engine method (ISO 5165:1998)*

EN ISO 6245:2002, *Petroleum products - Determination of ash (ISO 6245:2001)*

 EN ISO 10370:2014, *Petroleum products - Determination of carbon residue - Micro method (ISO 10370:2014)* 

 EN ISO 12156-1, *Diesel fuel - Assessment of lubricity using the high-frequency reciprocating rig (HFRR) - Part 1: Test method (ISO 12156-1)* 

 EN ISO 12185:1996¹, *Crude petroleum and petroleum products - Determination of density - Oscillating U-tube method (ISO 12185:1996)* 


EN ISO 12205:1996, *Petroleum products - Determination of the oxidation stability of middle-distillate fuels (ISO 12205:1995)*

EN ISO 12937:2000, *Petroleum products - Determination of water - Coulometric Karl Fischer titration method (ISO 12937:2000)*

EN ISO 13032:2012, *Petroleum products - Determination of low concentration of sulfur in automotive fuels - Energy-dispersive X-ray fluorescence spectrometric method (ISO 13032:2012)*

¹ Under revision.

² This document is currently impacted by EN ISO 4264:2007/A1:2013.

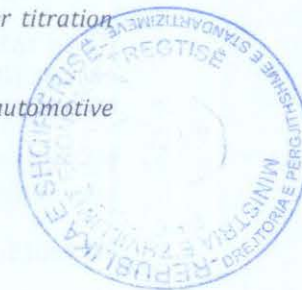

EN ISO 13759:1996, *Petroleum products - Determination of alkyl nitrate in diesel fuels - Spectrometric method (ISO 13759:1996)*

EN ISO 20846:2011, *Petroleum products - Determination of sulfur content of automotive fuels - Ultraviolet fluorescence method (ISO 20846:2011)*

EN ISO 20884:2011, *Petroleum products - Determination of sulfur content of automotive fuels - Wavelength-dispersive X-ray fluorescence spectrometry (ISO 20884:2011)*

3 Sampling

Samples shall be taken as described in EN ISO 3170 or EN ISO 3171 and/or in accordance with the requirements of national standards or regulations for the sampling of automotive diesel fuel. The national requirements shall be set out in detail or shall be referred to by reference in a National Annex to this European Standard.

In view of the sensitivity of some of the test methods referred to in this European Standard, particular attention shall be paid to compliance with any guidance on sampling containers which is included in the test method standard.

4 Pump marking

[A1] Information to be marked on dispensing pumps and nozzles used for delivering automotive diesel fuel, and the dimensions of the mark shall be in accordance with EN 16942. **[A1]**

Labelling shall be clearly visible, easily legible and displayed at any point where diesel with metallic additives is made available to consumers. The label shall contain: "Contains metallic additives" in the national language(s) and shall be laid down in the National Annex to this document.

5 Requirements and test methods

5.1 Dyes and markers

The use of dyes or markers is allowed.

5.2 Additives

5.2.1 General

In order to improve the performance quality, the use of additives is allowed. Suitable fuel additives without known harmful side-effects are recommended in the appropriate amount, to help to avoid deterioration of driveability and emissions control durability. Other technical means with equivalent effect may also be used.

NOTE Deposit forming tendency test methods suitable for routine control purposes have not yet been identified and developed.

5.2.2 Methylcyclopentadienyl manganese tricarbonyl (MMT)

[A1] When methylcyclopentadienyl manganese tricarbonyl (MMT) is used, a specific labelling is required (see also Clause 4). The presence of the MMT is limited via a manganese content limit as in Tables 1 and 2. **[A1]**

5.3 Fatty acid methyl ester (FAME)

A1 Diesel fuel may contain up to 7,0 % (V/V) of FAME complying with EN 14214:2012+A1:2014, in which case the climate dependent requirements set out in 5.4.2 of EN 14214:2012+A1:2014 do not apply. **A1**

NOTE 1 A suitable method for the separation and identification of FAME is given in EN 14331 [6].

Climate dependent requirements for FAME as a blending component for use in diesel fuel according to this document are set out in 5.4.3 of **A1** EN 14214:2012+A1:2014 **A1**. The specific grades shall be specified on a national basis according to local climatic conditions and the FAME volume in the diesel fuel.

The finished blend of diesel fuel shall also comply with the climate dependent requirements set out in 5.6. of this document.

Cold flow additives, when used in FAME, should be specifically matched to the base diesel fuel and FAME quality to ensure correct performance consistent with the requirements set out in this European Standard. The choice could result in incompatibility between the cold flow additives used in the FAME and the diesel fuel. The choice of cold flow additive technology should be a contractual matter between the fuel blender and the FAME supplier taking into account the climatic-dependent requirements of the finished diesel fuel.

NOTE 2 Cold flow requirements for FAME as a blend component in diesel fuel are set out in Tables 3a and 3b and the National Annex of **A1** EN 14214:2012+A1:2014 **A1**, in order to control maximum content of saturated monoglycerides in the final EN 590 blend to ensure trouble-free operation. Work is on-going to identify a suitable test method for saturated monoglycerides or a performance test to control this aspect of low temperature performance.

In order to improve the oxidation stability of FAME, it is strongly recommended to add oxidation stability enhancing additives to FAME at the production stage and before storage, providing an oxidation stability similar to that obtained with 1 000 mg/kg of 2,6-di-tert-butyl-4-hydroxytoluene (BHT, officially designated by IUPAC as 2,6-bis(1,1-dimethylethyl)-4-methylphenol).

The similar action may be read as providing oxidation stability performance at least equal to that obtained with 1 000 mg/kg of BHT.

CAUTION — There is a potential risk of precipitate formation with oxidation stability enhancing additives at low temperatures in low aromatic arctic fuel. Caution should therefore be taken in the choice of oxidation stability enhancing additives to arctic grade FAME.


5.4 Other (bio-) components

A1 Limits for FAME do not apply to other (non-petroleum derived) hydrocarbons, such as Hydrotreated Vegetable Oil (HVO), Gas To Liquid (GTL) or Biomass To Liquid (BTL) derived hydrocarbons, since these paraffinic diesel components are allowed in any proportions provided that the final blend complies with the requirements of this European Standard. The co-processing of renewable³ feedstock at refineries is also allowed provided that the final fuel meets the requirements of this European Standard". **A1**

5.5 Generally applicable requirements and related test methods

5.5.1 When tested by the methods indicated in Table 1, automotive diesel fuel shall be in accordance with the limits specified in Table 1. The test methods listed in Table 1 have been assessed for application to automotive diesel containing FAME. Precision data from inter-laboratory test

³ For clarification of renewable see Directive 2009/28/EC [15].

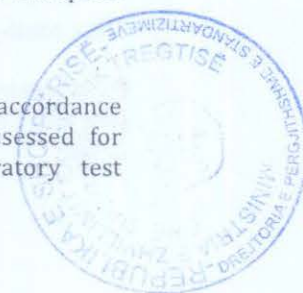

programmes are given in normative Annex A, where these were found to be different from the precision data given in the test methods for neat petroleum products.

5.5.2 The limiting value for the carbon residue given in Table 1 is based on product prior to addition of ignition improver, if used. If a value exceeding the limit is obtained on finished fuel in the market, EN ISO 13759 shall be used as an indicator of the presence of a nitrate-containing compound. If an ignition improver is thus proved present, the limit value for the carbon residue of the product under test cannot be applied. The use of additives does not exempt the manufacturer from meeting the requirement of maximum 0,30 % (*m/m*) of carbon residue prior to addition of additives.

5.5.3 Diesel fuel shall be free from any adulterant or contaminant that may render the fuel unacceptable for use in diesel engine vehicles.

NOTE For further information on preventing contamination by water or sediment that may occur in the supply chain, or for cross-contamination, it is advisable to check CEN/TR 15367-1 **A1** [7] **A1** or CEN/TR 15367-3 **A1** [8] **A1** respectively.



Table 1 — Generally applicable requirements and test methods for automotive diesel fuel

Property	Unit	Limits		Test method ^a (See Clause 2)
		minimum	maximum	
Cetane number		51,0	–	EN ISO 5165 ^b EN 15195 EN 16144 [A1] EN 16715 [A1]
Cetane index		46,0	–	EN ISO 4264
Density at 15 °C	kg/m ³	820,0	845,0	EN ISO 3675 ^c EN ISO 12185
Polycyclic aromatic hydrocarbons ^d	% (m/m)	–	8,0	EN 12916
Sulfur content	mg/kg	–	10,0	EN ISO 20846 ^e EN ISO 20884 EN ISO 13032
Manganese content ^f		[A1] Deleted text. [A1]	[A1] Deleted text. [A1]	[A1] EN 16576 [A1]
[A1] Deleted text. [A1]	mg/l	–	2,0	
Flash point	°C	Above 55,0	–	EN ISO 2719
Carbon residue ^g (on 10 % distillation residue)	% (m/m)	–	0,30	EN ISO 10370
Ash content	% (m/m)	–	0,010	EN ISO 6245
Water content	[A1] % (m/m) [A1]	–	[A1] 0,020 [A1]	EN ISO 12937
Total contamination	mg/kg	–	24	EN 12662 ^h
Copper strip corrosion (3 h at 50 °C)	rating	class 1		EN ISO 2160
Fatty acid methyl ester (FAME) content ⁱ	% (V/V)	–	7,0	EN 14078
Oxidation stability ^j	g/m ³	–	25	EN ISO 12205
	h	20	–	EN 15751
[A1] Lubricity, wear scar diameter (WSD) at 60 °C [A1]	µm	–	460	EN ISO 12156-1 [A1] ⁿ [A1]
Viscosity at 40 °C	mm ² /s	2,000	4,500	EN ISO 3104
Distillation ^{k,l}				EN ISO 3405 ^m EN ISO 3924
% (V/V) recovered at 250 °C	% (V/V)		< 65	
% (V/V) recovered at 350 °C	% (V/V)	85		
95 % (V/V) recovered at	°C		360	

[A1] NOTE Requirements in bold refer to the European Fuels Directive 98/70/EC [1], including subsequent Amendments [2], [3], [4] and [12] [A1].

^a See also 5.7.1.

^b See also 5.7.4.

^c See also 5.7.2.

^d For the purposes of this European Standard, polycyclic aromatic hydrocarbons are defined as the total aromatic hydrocarbon content less the mono-aromatic hydrocarbon content, both as determined by EN 12916.

^e See also 5.7.3.

^f See also 5.2.2.

^g See also 5.5.2 and Annex A.

^h Further investigation into the total contamination test method to improve the precision, particularly in the presence of FAME, is being carried out by CEN.

ⁱ FAME shall meet the requirements of EN 14214, see [3].

^j When diesel fuel contains more than 2 % (V/V) FAME, oxidation stability as determined by EN 15751 is the requirement.

^k For the calculation of the cetane index the 10 %, 50 % and 90 % (V/V) recovery points are also needed.

^l The limits for distillation at 250 °C and 350 °C are included for diesel fuel in line with EU Common Customs tariff.

^m EN ISO 3924 gives instructions to convert to ISO 3405-equivalent data. See also 5.7.5.

ⁿ [A1] At the time of publication this standard is under revision. This revision is focussed on correcting the ambient test conditions to reflect those met in the ILS conducted. This will not affect the precision of the test method. [A1]

5.6 Climate dependent requirements and related test methods

5.6.1 For climate-dependent requirements, options are given to allow for seasonal grades to be set nationally. The options are for temperate climates six CFPP (cold filter plugging point) grades and for arctic or severe winter climates five different classes. Climate-dependent requirements are given in Table 2 (temperate climates) and Table 3 (arctic or severe winter climates). When tested by the methods given in Table 2 and Table 3, automotive diesel fuel shall be in accordance with the limits specified in these tables.


NOTE Attention is drawn to CEN/TR 16884 [13] on cold operability testing and fuel performance correlation. In addition, CEN has developed another technical report on cold filterability issues [14] that have been reported in some geographical areas at low temperatures above the cloud point of the fuel. Work to improve understanding of these issues and develop technical solutions is on-going within CEN and some national standardisation bodies. 





Table 2 — Climate-related requirements and test methods — Temperate climates

Property	Unit	Limits						Test method ^a (See Clause 2)
		Grade A	Grade B	Grade C	Grade D	Grade E	Grade F	
CFPP	°C, max.	+5	0	-5	-10	-15	-20	EN 116 ^b EN 16329
^a See also 5.7.1. ^b See 5.7.6.								



Table 3 — Climate-related requirements and test methods — Arctic or severe winter climates

Property	Units	Limits					Test method ^a (See Clause 2)
		class 0	class 1	class 2	class 3	class 4	
CFPP	°C, max.	-20	-26	-32	-38	-44	EN 116 ^b EN 16329
Cloud point	°C, max.	-10	-16	-22	-28	-34	EN 23015
Density at 15 °C	kg/m ³ , min.	800,0	800,0	800,0	800,0	800,0	EN ISO 3675 ^c
	kg/m ³ , max.	845,0	845,0	840,0	840,0	840,0	EN ISO 12185
Viscosity at 40 °C	mm ² /s, min.	1,500	1,500	1,500	1,400	1,200	EN ISO 3104
	mm ² /s, max.	4,000	4,000	4,000	4,000	4,000	
Cetane number EU ^e	minimum	51,0	51,0	51,0	51,0	51,0	EN ISO 5165 ^d EN 15195 EN 16144
Cetane number ^f	minimum	49,0	49,0	48,0	47,0	47,0	EN ISO 5165 ^d EN 15195 EN 16144
Cetane index	minimum	46,0	46,0	46,0	43,0	43,0	EN ISO 4264
Distillation ^{g, h}							EN ISO 3405 ⁱ
recovered at 180 °C	% (V/V), max.	10,0	10,0	10,0	10,0	10,0	EN ISO 3924
recovered at 340 °C	% (V/V), min.	95,0	95,0	95,0	95,0	95,0	

^a See also 5.7.1.
^b See also 5.7.6.
^c See also 5.7.2.
^d See also 5.7.4.
^e  In countries where the European Fuels Directive 98/70 EC [1] including amendments 2003/17/EC [2], 2009/30/EC [3], 2011/63/EU [4] and 2014/77/EU [12] applies. 
^f  In countries where the European Fuels Directive 98/70 EC [1] including amendments 2003/17/EC [2], 2009/30/EC [3], 2011/63/EU [4] and 2014/77/EU [12] does not apply. 
^g EU Common Customs Tariff definition of gas oil may not apply to the grades defined for use in arctic or severe winter climates.
^h For the calculation of the cetane index the 10 % (V/V), 50 % (V/V) and 90 % (V/V) recovery points are also needed.
ⁱ See also 5.7.5.

5.6.2 In a National Annex to this European Standard, each country shall detail requirements for a summer and a winter grade and may include (an) intermediate and/or regional grade(s) which shall be justified by national meteorological data.

5.7 Precision and dispute

5.7.1 All test methods referred to in this European Standard include a precision statement. In cases of dispute, the procedures for resolving the dispute and interpretation of the results based on test method precision, described in EN ISO 4259, shall be used.

5.7.2 In cases of dispute concerning density, ~~EN~~ EN ISO 12185 ~~EN~~ shall be used.

5.7.3 In cases of dispute concerning sulfur content, either EN ISO 20846 or EN ISO 20884 shall be used.

5.7.4 In cases of dispute concerning cetane number, EN ISO 5165 shall be used. For the determination of cetane number alternative methods to those indicated in Table 1 and Table 3 may also be used, provided that these methods originate from a recognised method series, and have a valid precision statement, derived in accordance with EN ISO 4259, which demonstrates precision at least equal to that of the referenced method. The test result, when using an alternative method, shall also have a demonstrable relationship to the result obtained when using the referenced method.

5.7.5 In cases of dispute concerning distillation, EN ISO 3405 shall be used.

5.7.6 In cases of dispute concerning CFPP, EN 116 shall be used.



Annex A (normative)

Details of inter-laboratory test programme

Table A.1 presents the precision data obtained in inter-laboratory testing programmes by CEN/TC 19 [A1] [9] [A1] and the EI [A1] [10] [A1], that differ from those of test methods listed in Table 1 and that at the time of publication of this European Standard were not yet revised.

NOTE The following methods were found to have precision data for 5 % (V/V) FAME blends similar to the published values:

- Ash content: EN ISO 6245,
- Oxidation stability: EN ISO 12205,
- CFPP: EN 116.

Table A.1 — Precision data updates

Property	Test method	Unit	CEN/TC 19 data for 5 % (V/V) FAME blend
Viscosity at 40 °C	EN ISO 3104	mm ² /s	$r = 0,001\ 1\ X$ $R = 0,018\ X$
Flash point	EN ISO 2719	°C	$r = 2,0$ $R = 3,5$
Carbon residue	EN ISO 10370	% (m/m)	$r = 0,143\ 0\ X^{0,5}$ $R = 0,212\ 5\ X^{0,5}$
where r is repeatability (EN ISO 4259) R is reproducibility (EN ISO 4259) X is the mean of two results being compared			



Bibliography

- [1] Directive 98/70/EC of the European Parliament and of the Council of 13 October 1998 relating to the quality of petrol and diesel fuels and amending Council Directive 93/12/EEC
- [2] Directive 2003/17/EC of the European Parliament and of the Council of 3 March 2003 amending Directive 98/70/EC relating to the quality of petrol and diesel fuels and amending Council Directive 93/12/EEC
- [3] Directive 2009/30/EC of the European Parliament and of the Council of 23 April 2009 amending Directive 98/70/EC as regards the specification of petrol, diesel and gas-oil and introducing a mechanism to monitor and reduce greenhouse gas emissions and amending Council Directive 1999/32/EC as regards the specification of fuel used by inland waterway vessels and repealing Directive 93/12/EEC
- [4] Directive 2011/63/EU of 1 June 2011 amending, for the purpose of its adaptation to technical progress, Directive 98/70/EC of the European Parliament and of the Council relating to the quality of petrol and diesel fuels
- [5] Mandate M/394 - Mandate to CEN on the revision of EN 590 to increase the concentration of FAME and FAEE to 10% v/v, 13 November 2006
- [6] EN 14331:2004, *Liquid petroleum products - Separation and characterisation of fatty acid methyl esters (FAME) from middle distillates - Liquid chromatography (LC)/gas chromatography (GC) method*
- [A1] Deleted text. [A1]
- [A1] [7] [A1] CEN/TR 15367-1, *Petroleum products - Guidelines for good housekeeping - Part 1: Automotive diesel fuels*
- [A1] [8] [A1] CEN/TR 15367-3, *Petroleum products - Guide for good housekeeping - Part 3: Prevention of cross contamination*
- [A1] [9] [A1] CEN/TR 15160, *Petroleum and related products - Applicability of diesel fuel test methods for Fatty Acid Methyl Esters (FAME) - Information and results on round robin tests*
- [A1] [10] [A1] EI Research Report on IP 398 and EN ISO 10370, under publication, available from the Energy Institute, 61 New Cavendish Street, London W1G 7AR, England
- [A1] [11] Directive 2014/94/EU of the European Parliament and of the Council of 22 October 2014 on the deployment of alternative fuels infrastructure [A1]
- [A1] [12] Commission Directive 2014/77/EU of 10 June 2014 amending Annexes I and II of Directive 98/70/EC of the European Parliament and of the Council relating to the quality of petrol and diesel fuels" [A1]
- [A1] [13] CEN/TR 16884, *Automotive fuels — Diesel fuel — Cold operability testing and fuel performance correlation* [A1]
- [A1] [14] CEN/TR 16982, *Diesel blends - Cold filterability issues* [A1]
- [A1] [15] Directive 2009/28/EC of the European Parliament and of the Council of 23 April 2009 on the promotion of the use of energy from renewable sources and amending and subsequently repealing Directives 2001/77/EC and 2003/30/EC" [A1]

STANDARD SHQIPTAR

SSH EN 228:2012+A1:2017

**Lëndët djegëse për automjete - Benzinë pa
plumb - Kërkesat dhe metodat e provës**

**Automotive fuels - Unleaded petrol -
Requirements and test methods**



DPS Drejtoria e Përgjithshme e Standardizimit

Adresa: Rruga "Mine Peza", 143/3, 1014 Tiranë – Shqipëri,

Kutia Postare: 98,

Tel: + 355 (0) 4 222 62 55; Fax: + 355 (0) 4 224 71 77

E-mail: info@dps.gov.al

© DPS

Riprodhimi është i ndaluar. E drejta ekskluzive për publikimin dhe shitjen e Standardeve Shqiptare i takon DPS.

Hyrje

Drejtoria e Përgjithshme e Standardizimit, DPS, është Organi Kombëtar i Standardizimit në Republikën e Shqipërisë.

DPS harton, miraton dhe publikon standardet puro shqiptare, si dhe adopton dhe publikon standardet evropiane dhe ndërkombëtare, duke iu dhënë atyre statusin e Standardeve Shqiptare (SSH). Të njëjtat kompetenca ka edhe për dokumentet e standardizimit. Miratimi formal i tyre bëhet nga Drejtori i Përgjithshëm i DPS.

Standardet Shqiptare hartohen dhe adoptohen nga Komitetet Teknike (KT). Anëtarët e Komiteteve Teknike janë specialistë të subjekteve shtetërore dhe private nga fusha të ndryshme të ekonomisë që angazhohen vullnetarisht në këtë proces.

Standardi EN 228:2012+A1:2017 është hartuar nga KT 19 dhe miratuar nga DPS si standard më 2017-06-15.

Standardi SSH EN 228:2012+A1:2017 botohet për herë të katërt.

Ky standard është i njëjtë me standardin EN 228:2012+A1:2017 dhe riprodhohet me lejen e:

Komitetit Evropian për Standardizimin – CEN,
Avenue Marnix 17
B-1000 Brussels

Të gjitha të drejtat e shpërndarjes së standardeve evropiane dhe ndërkombëtare në çdo lloj forme në të gjithë botën i takojnë CEN, CENELEC, ETSI, ISO, IEC dhe anëtarëve kombëtare. Asnjë nismë për riprodhimin e tyre nuk mund të ndërmerret pa lejen me shkrim më parë të CEN, CENELEC, ISO, IEC dhe ETSI nëpërmjet të licencuarit.



Standardet rishikohen kur është e nevojshme, prandaj është e domosdoshme që përdoruesi të marrë botimin e fundit si dhe amendamentet e tij, nëse ka të tilla.

English Version

Automotive fuels - Unleaded petrol - Requirements and test methods

Carburants pour automobiles - Essence sans plomb -
Exigences et méthodes d'essai

Kraftstoffe für Kraftfahrzeuge - Unverbleite
Ottokraftstoffe - Anforderungen und Prüfverfahren

This European Standard was approved by CEN on 1 September 2012 and includes Amendment 1 approved by CEN on 17 March 2017.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.



CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

	Page
European foreword.....	3
1 Scope.....	5
2 Normative references.....	5
3 Sampling.....	7
4 Pump marking.....	7
5 Requirements and test methods.....	7
5.1  Bio-components 	7
5.2 Dyes and markers	8
5.3 Additives.....	8
5.4 Generally applicable requirements and test methods	8
5.5 Climatically dependent requirements and test methods	11
5.6 Octane reporting	15
5.7 Precision and dispute	15
Annex A (normative) Vapour pressure waiver	17
A.1 Vapour pressure waiver permitted	17
A.2 Guidance for checking compliance with the permitted waiver.....	17
Bibliography.....	19



European foreword

This document (EN 228:2012+A1:2017) has been prepared by Technical Committee CEN/TC 19 "Gaseous and liquid fuels, lubricants and related products of petroleum, synthetic and biological origin", the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2017, and conflicting national standards shall be withdrawn at the latest by November 2017.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes A1 EN 228:2012 A1.

This document includes Amendment 1 approved by CEN on 17 March 2017.

The start and finish of text introduced or altered by amendment is indicated in the text by tags A1 A1.

This document was originally prepared under a mandate given to CEN by the European Commission and the European Free Trade Association. In addition to other standards, it is intended to be complementary to the regulatory measures contained in various EU Directives.

The following is a list of significant technical changes between this European Standard and the previous edition:

- A1 New requirements following amendment 2009/30/EC [3], 2011/63/EU [4] and 2014/77/EU [11] to the European Fuels Quality Directive 98/70/EC [1], are taken into account. A1 Tables 1, 2, 3, 4 and A.1 explicitly differentiate between requirements included in the European Fuels Directive 98/70/EC [1], including subsequent Amendments [2], [3] and [4], and other requirements.
- Specific requirements concerning the limitation of use of methylcyclopentadienyl manganese tricarbonyl (MMT) as required by the EC have been incorporated.
- As the introduction of 10 % (V/V) of ethanol in unleaded petrol has an impact on refinery and blending processes, an update of the distillation characteristics has been considered and a new Table 3 with slightly adapted volatility classes (E70, E100 and VLI) has been introduced. Work is still ongoing to generate data that would support the idea that these changes do not affect cold starting and hot weather driveability aspects of the vehicles. These updates have been agreed upon with precaution and might be revised depending on fuel-related issues in the market.
- Further specification is given, by including separate tables on unleaded petrol grade for older vehicles that are not warranted to use unleaded petrol with a high biofuel content. A CEN/TR aiming at giving guidance on oxygenate blending has been prepared in parallel [5].
- Further clarification on how to determine the vapour pressure waiver for unleaded petrol containing ethanol, allowed on the market under exemption circumstances, is given in Annex A. The exact number of decimal points for the waiver has been clarified [4].
- Several new or revised test methods have been introduced. The European Fuels Directive 98/70/EC [1], including its Amendments [2] [3] [4], A1 [11] A1 refers to test methods in

EN 228:2004, with the requirement that updated analytical methods shall be shown to give at least the same accuracy and at least the same precision as the methods they replace.

- Removal of the allowance for 50 mg/kg sulfur content.
- Reference to the revised ethanol specification EN 15376.

[A1] The marking at the pump of this product is in line with the requirements of the Fuels Quality Directive and the Alternative Fuels Infrastructure Directive [12]. **[A1]**

According to the CEN/CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



1 Scope

This European Standard specifies requirements and test methods for marketed and delivered unleaded petrol. It is applicable to unleaded petrol for use in petrol engine vehicles designed to run on unleaded petrol.

This European Standard specifies two types of unleaded petrol: one type with a maximum oxygen content of 3,7 % (m/m) and a maximum ethanol content of 10,0 % (V/V) in Table 1, and one type intended for older vehicles that are not warranted to use unleaded petrol with a high biofuel content, with a maximum oxygen content of 2,7 % (m/m) and a maximum ethanol content of 5,0 % (V/V) in Table 2.

NOTE 1 The two types are based on European Directive requirements [3], [4],  [11] .



NOTE 2 For the purposes of this European Standard, the terms "% (m/m)" and "% (V/V)" are used to represent respectively the mass fraction, μ , and the volume fraction, φ .

2 Normative references



The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 237:2004, *Liquid petroleum products — Petrol — Determination of low lead concentrations by atomic absorption spectrometry*



EN 238:1996/A1:2003, *Liquid petroleum products — Petrol — Determination of the benzene content by infrared spectrometry*



 EN 1601:2014¹, *Liquid petroleum products — Unleaded petrol — Determination of organic oxygenate compounds and total organically bound oxygen content by gas chromatography (O-FID)* 

EN 12177:1998, *Liquid petroleum products — Unleaded petrol — Determination of benzene content by gas chromatography*

 EN 13016-1:2007¹, *Liquid petroleum products — Vapour pressure — Part 1: Determination of air saturated vapour pressure (ASVP) and calculated dry vapour pressure equivalent (DVPE)* 

EN 13132:2000, *Liquid petroleum products — Unleaded petrol - Determination of organic oxygenate compounds and total organically bound oxygen content by gas chromatography using column switching*

 EN 14275:2013, *Automotive fuels — Assessment of petrol and diesel fuel quality — Sampling from retail site pumps and commercial site fuel dispensers* 

 EN 15376:2014, *Automotive fuels — Ethanol as a blending component for petrol — Requirements and test methods* 

EN 15553:2007, *Petroleum products and related materials — Determination of hydrocarbon types - Fluorescent indicator adsorption method*

¹ Under revision.

EN 228:2012+A1:2017 (E)

EN 16135:2011, *Automotive fuels — Determination of manganese content in unleaded petrol — Flame atomic absorption spectrometric method (FAAS)*

EN 16136:2015, *Automotive fuels — Determination of manganese content in unleaded petrol — Inductively coupled plasma optical emission spectrometry (ICP OES) method* ^(A1)

EN 16942:2016, *Fuels — Identification of vehicle compatibility — Graphical expression for consumer information* ^(A1)

EN ISO 2160:1998, *Petroleum products — Corrosiveness to copper — Copper strip test (ISO 2160:1998)*

EN ISO 3170:2004, *Petroleum liquids — Manual sampling (ISO 3170:2004)*

EN ISO 3171:1999, *Petroleum liquids — Automatic pipeline sampling (ISO 3171:1998)*

EN ISO 3405:2011¹, *Petroleum products — Determination of distillation characteristics at atmospheric pressure (ISO 3405:2011)* ^(A1)

EN ISO 3675:1998, *Crude petroleum and liquid petroleum products — Laboratory determination of density — Hydrometer method (ISO 3675:1998)*

EN ISO 4259:2006¹, *Petroleum products — Determination and application of precision data in relation to methods of test (ISO 4259:2006)* ^(A1)

EN ISO 5163:2014, *Petroleum products — Determination of knock characteristics of motor and aviation fuels — Motor method (ISO 5163:2014)* ^(A1)

EN ISO 5164:2014¹, *Petroleum products — Determination of knock characteristics of motor fuels — Research method (ISO 5164:2014)* ^(A1)

EN ISO 6246:2017, *Petroleum products — Gum content of light and middle distillate fuels — Jet evaporation method (ISO 6246:2017)* ^(A1)

EN ISO 7536:1996, *Petroleum products — Determination of oxidation stability of gasoline — Induction period method (ISO 7536:1994)*

EN ISO 12185:1996¹, *Crude petroleum and petroleum products — Determination of density — Oscillating U-tube method (ISO 12185:1996)* ^(A1)

EN ISO 13032:2012, *Petroleum products — Determination of low concentration of sulfur in automotive fuels — Energy-dispersive X-ray fluorescence spectrometric method (ISO 13032:2012)*

EN ISO 20846:2011, *Petroleum products — Determination of sulfur content of automotive fuels — Ultraviolet fluorescence method (ISO 20846:2011)*

EN ISO 20884:2011, *Petroleum products — Determination of sulfur content of automotive fuels — Wavelength-dispersive X-ray fluorescence spectrometry (ISO 20884:2011)*

EN ISO 22854:2016, *Liquid petroleum products — Determination of hydrocarbon types and oxygenates in automotive-motor gasoline and in ethanol (E85) automotive fuel — Multidimensional gas chromatography method (ISO 22854:2016)* ^(A1)



3 Sampling

Samples shall be taken as described in EN ISO 3170 or EN ISO 3171 and/or in accordance with the requirements of national standards or regulations for the sampling of unleaded petrol. The national requirements shall be set out in detail or shall be referred to by reference in a national annex to this European Standard.

In view of the sensitivity of some of the test methods referred to in this European Standard, particular attention shall be paid to compliance with any guidance on sampling containers, which is included in the test method standard.

It is essential that for sampling of unleaded petrol the containers used to take and store the samples before testing are not contaminated, especially with lead and/or sulfur.

4 Pump marking

A1 Information to be marked on dispensing pumps and nozzles used for delivering unleaded petrol, and the dimensions of the mark shall be in accordance with EN 16942. **A1**

Labelling shall be clearly visible, easily legible and displayed at any point where unleaded petrol with metallic additives is made available to consumers. The label shall contain: "Contains metallic additives" in the national language(s) and shall be laid down in the National Annex to this document.

A1 Deleted text. **A1**

A1 It is also recommended that additional pump marking be applied to specify the RON supplied. **A1**

5 Requirements and test methods

5.1 **A1** Bio-components **A1**

5.1.1 **A1** Ethanol **A1**

Unleaded petrol may contain up to 10,0 % (V/V) of ethanol complying with EN 15376.

When ethanol is used as a blending component, it may contain denaturants, if required by European and national regulations. These denaturants are permitted provided they do not cause harmful side effects to vehicles and fuel distribution systems.

NOTE Further advice on handling and blending oxygenates in general can be found in [6]. Further guidance on blending oxygenates in accordance with the requirements of 2009/30/EC is given in CEN/TR 16435 [5].

A traceable record of biological origin is recommended. For the determination of biological origin of ethanol, an alternative is age determination, which is based on the beta(minus) decay of the radioactive carbon isotope C 14. This method [9] is considered too laborious for frequent testing, but it may be considered a useful tool to determine cases where the audit trail approach is contested.

5.1.2 **A1** Other (bio-)components

Limits for adding ethanol and other oxygenates as listed in Table 1 and Table 2 do not apply to other hydrocarbons, such as synthetic hydrocarbons, and other renewable² hydrocarbons, since these components are allowed in any proportions provided that the final blend complies with the

² For clarification of renewable, see [13].

requirements of EN 228. The co-processing of renewable feedstock at refineries is also allowed provided that the final fuel meets the requirements of EN 228. ^(A1)

5.2 Dyes and markers

The use of dyes and markers is allowed provided they do not cause harmful side effects to vehicle and fuel distribution systems.

5.3 Additives

5.3.1 General

In order to improve performance quality, the use of additives is allowed. Suitable fuel additives without known harmful side effects are recommended in the appropriate amount to help avoid deterioration of driveability and emissions control durability. Other technical means with equivalent effects may also be used.

^(A1) Deleted text. ^(A1)

NOTE Deposit forming tendency test methods suitable for routine control purposes have not yet been identified and developed.

5.3.2 Phosphorus

In order to protect automotive catalyst systems, compounds containing phosphorus shall not be added to unleaded petrol.

5.3.3 Methylcyclopentadienyl Manganese Tricarbonyl (MMT)

When methylcyclopentadienyl manganese tricarbonyl (MMT) is used, a specific labelling is required (see Clause 4).

MMT is a metallic additive that may be used in unleaded petrol.

^(A1) Deleted text. ^(A1)

5.4 Generally applicable requirements and test methods

When tested by the methods indicated in Tables 1, 2, 3 and 4, unleaded petrol, according to its maximum oxygen content, shall be in accordance with the limits specified respectively in Tables 1 and 3, or 2 and 4.

Member States may decide to continue to permit the placing on the market of unleaded regular grade petrol. This separate grade needs to conform to all requirements set out in Tables 1, 2 3 and 4 of this European Standard with the exception of a minimum motor octane number (MON) of 81 and a minimum research octane number (RON) of 91. The requirements and test methods are then to be laid down in a National Annex to this document.

Methods of test included as normative references in this European Standard, when updated, shall give at least the same accuracy and at least the same level of precision as the methods they replace.

^(A1) Unleaded petrol shall be free from any adulterant or contaminant that can render the fuel unacceptable for use in petrol engine vehicles designed to run on unleaded petrol. ^(A1)

NOTE For further information on preventing contamination in the supply chain or for cross-contamination it is advisable to check CEN/TR 15367, Parts 2 and 3 respectively [7, 8]. A determination method for high boiling components in unleaded petrol is being under development by CEN.

Table 1 — Requirements and test methods for unleaded petrol with a maximum oxygen content of 3,7 % (m/m)

Property	Units	Limits		Test Method ^a (See 2. Normative references)
		Min	Max	
Research octane number, RON		95,0	--	EN ISO 5164 ^b
Motor octane number, MON		85,0	--	EN ISO 5163 ^b
Lead content	mg/l	--	5,0	EN 237
Density (at 15 °C) ^c	kg/m ³	720,0	775,0	EN ISO 3675 EN ISO 12185
Sulfur content ^c	mg/kg	--	10,0	EN ISO 13032 EN ISO 20846 EN ISO 20884
Manganese content ^d		EN ISO 13032	EN ISO 20846	EN 16135
EN ISO 13032	mg/l	--	2,0	EN 16136
Oxidation stability	minutes	360	--	EN ISO 7536
Existent gum content (solvent washed)	mg/100 ml	--	5	EN ISO 6246
Copper strip corrosion (3 h at 50 °C)	rating	class 1		EN ISO 2160
Appearance ^e		clear and bright		Visual inspection
Hydrocarbon type content ^c	% (V/V)			EN 15553
- olefins		--	18,0	EN ISO 22854
- aromatics		--	35,0	
Benzene content ^c	% (V/V)	--	1,00	EN 238 EN 12177 EN ISO 22854
Oxygen content ^{c,i}	% (m/m)	--	3,7	EN 1601 EN 13132 EN ISO 22854
Oxygenates content ^c	% (V/V)			EN 1601
- methanol ^f		--	3,0	EN 13132
- ethanol ^g		--	10,0	EN ISO 22854
- iso-propyl alcohol		--	12,0	
- iso-butyl alcohol		--	15,0	
- tert-butyl alcohol		--	15,0	
- ethers (5 or more C atoms)		--	22,0	
- other oxygenates ^h		--	15,0	

^a NOTE Requirements in bold refer to the European Fuels Directive 98/70/EC [1], including subsequent Amendments [2], [3], [4] and [11]. ^b

^a See also 5.7.1.

^b ^b A correction of 0,2 for MON and RON shall be subtracted for the calculation of the final result, before reporting according to the requirement of the European Fuels Directive 98/70/EC [1], including subsequent Amendments [2], [3], [4] and [11]. ^c See also 5.6 and 5.7.2.

^c See also 5.7.2.

^d See also 5.3.3.

^e Appearance shall be determined at ambient temperature.

^f Stabilising agents shall be added.

^g Ethanol when used as a blending component shall conform to EN 15376 (see 5.1). Stabilising agents may be added.

^h Other mono-alcohols and ethers with a final boiling point no higher than prescribed in Table 3.

ⁱ ⁱ EN 13131 contains no precision statement for an oxygen content above 3 % (m/m). ^b Based on the round robin data from the last six years, CEN/TC 19 accepts an average reproducibility value of $R = 0,37$ for all test methods.

Table 2 — Requirements and test methods for unleaded petrol with a maximum oxygen content of 2,7 % (m/m)

Property	Units	Limits Min Max		Test Method ^a (See 2. Normative references)
Research octane number, RON		95,0	--	EN ISO 5164 ^b
Motor octane number, MON		85,0	--	EN ISO 5163 ^b
Lead content	mg/l	--	5,0	EN 237
Density (at 15 °C) ^c	kg/m ³	720,0	775,0	EN ISO 3675 EN ISO 12185
Sulfur content ^c	mg/kg	--	10,0	EN ISO 13032 EN ISO 20846 EN ISO 20884
Manganese content ^d		(A1) Deleted text. (A1)	(A1) Deleted text. (A1)	EN 16135
(A1) Deleted text. (A1)	mg/l	--	2,0	EN 16136
Oxidation stability	minutes	360	--	EN ISO 7536
Existent gum content (solvent washed)	mg/100 ml	--	5	EN ISO 6246
Copper strip corrosion (3 h at 50 °C)	rating	class 1		EN ISO 2160
Appearance ^e		clear and bright		Visual inspection
Hydrocarbon type content ^c	% (V/V)			EN 15553 EN ISO 22854
- olefins		--	18,0	
- aromatics		--	35,0	
Benzene content ^c	% (V/V)	--	1,00	EN 238 EN 12177 EN ISO 22854
Oxygen content ^c	% (m/m)	--	2,7	EN 1601 EN 13132 EN ISO 22854
Oxygenates content ^c	% (V/V)			EN 1601 EN 13132 EN ISO 22854
- methanol ^f		--	3,0	
- ethanol ^g		--	5,0	
- iso-propyl alcohol ^h		}	Volume blending restricted to 2,7 % (m/m) maximum oxygen content	
- iso-butyl alcohol ^h				
- tert-butyl alcohol ^h				
- ethers (5 or more C atoms) ^h				
- other oxygenates ^{h, i}				

(A1) NOTE Requirements in bold refer to the European Fuels Directive 98/70/EC [1], including subsequent Amendments [2], [3], [4] and [11]. **(A1)**

^a See also 5.7.1

^b **(A1)** A correction of 0,2 for MON and RON shall be subtracted for the calculation of the final result, before reporting according to the requirement of the European Fuels Directive 98/70/EC [1], including subsequent Amendments [2], [3], [4] and [11]. **(A1)** See also 5.6 and 5.7.2.

^c See also 5.7.2.

^d See also 5.3.3.

^e Appearance shall be determined at ambient temperature.

^f Stabilising agents shall be added.

^g Ethanol when used as a blending component shall conform to EN 15376 (see 5.1). Stabilising agents may be added.

^h The oxygen content of the finished unleaded petrol shall not exceed 2,7 % (m/m). **(A1)** See CEN/TR 16435 [5] on oxygenate blending for information. **(A1)**

ⁱ Other mono-alcohols and ethers with a final boiling point no higher than prescribed in Table 4.

5.5 Climatically dependent requirements and test methods

5.5.1 Water tolerance

Given the known potential for some petrol to absorb water, suppliers shall ensure that no water segregation occurs under the range of climatic conditions experienced in the country concerned. When there is a risk of water separation, anti-corrosion additives shall be incorporated.

NOTE For further information on preventing contamination by water or sediment that may occur in the supply chain or for cross-contamination it is advisable to check CEN/TR 15367, Parts 2 and 3 respectively [7, 8].

5.5.2 Volatility requirements

To meet hot and cold vehicle driveability requirements under the European seasonal and geographical conditions, ten volatility classes are defined as given in Table 3, Table 4 and illustrated in Figure 1 and Figure 2. Each country shall, in a national annex to this European Standard, specify for each type of unleaded petrol which of these ten volatility classes apply during which period of the year for defined regions of the country.

Class A shall apply during summer, starting not later than 1 May and ending not before 30 September. In countries with low ambient summer temperatures, as defined in [3], Class B shall apply during summer, starting not later than 1 June and ending not before 31 August.

Each country shall apply one or more volatility classes with VLI (Class C1, D1, E1, or F1) for the transition periods on either side of summer. Each transition period shall be a minimum of four weeks. When transition periods are deemed critical, the critical transition period(s) shall be a minimum of eight weeks. During the remaining period, one or more winter classes shall apply with or without VLI (Class C, C1, D, D1, E, E1, F or F1).

The application of the vapour pressure waiver permitted for unleaded petrol containing bioethanol is restricted to countries having fulfilled the requirements as laid down in [3].

When such waiver is permitted and applied, due reference shall be made in a national annex to this Standard and the waiver shall apply to Annex A.



Table 3 — Volatility classes for unleaded petrol with a maximum oxygen content of 3,7 % (m/m)

Property	Units	Limits						Test method ^a (See 2. Normative references)
		class A	class B	class C/C1	class D/D1	class E/E1	class F/F1	
Vapour pressure (VP)	kPa, min	45,0	45,0	50,0	60,0	65,0	70,0	EN 13016-1 ^b
	kPa, max	60,0	70,0	80,0	90,0	95,0	100,0	
% evaporated at 70°C, E70	% (V/V), min	22,0	22,0	24,0	24,0	24,0	24,0	EN ISO 3405
	% (V/V), max	50,0	50,0	52,0	52,0	52,0	52,0	
% evaporated at 100°C, E100	% (V/V), min	46,0	46,0	46,0	46,0	46,0	46,0	EN ISO 3405
	% (V/V), max	72,0	72,0	72,0	72,0	72,0	72,0	
% evaporated at 150°C, E150	% (V/V), min	75,0	75,0	75,0	75,0	75,0	75,0	EN ISO 3405
Final Boiling Point FBP	°C, max	210	210	210	210	210	210	EN ISO 3405
Distillation residue	% (V/V), max	2	2	2	2	2	2	EN ISO 3405
Vapour Lock Index (VLI) (10 VP + 7 E70)	index, max	--	--	C --	D --	E --	F --	
Vapour Lock Index (VLI) (10 VP + 7 E70)	index, max			C1 1064	D1 1164	E1 1214	F1 1264	
NOTE Requirements in bold refer to the European Fuels Directive 98/70/EC [1], including subsequent Amendments [2], [3], [4] and [11]. A1								
^a See also 5.7.1.								
^b Dry Vapour Pressure Equivalent (DVPE) shall be reported.								



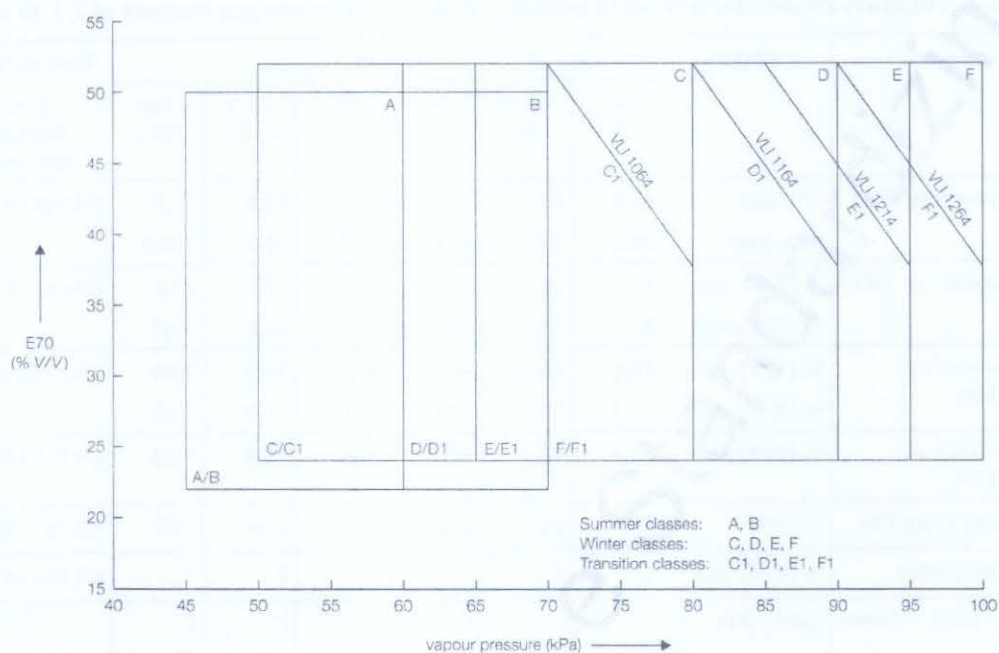


Figure 1 — Relation between VP, E70 and VLI for the ten different volatility classes for unleaded petrol with a maximum oxygen content of 3,7 % (m/m)



Table 4 — Volatility classes for unleaded petrol with a maximum oxygen content of 2,7 % (m/m)

Property	Units	Limits						Test method ^a (See 2. Normative references)
		class A	class B	class C/C1	class D/D1	class E/E1	class F/F1	
Vapour pressure (VP)	kPa, min	45,0	45,0	50,0	60,0	65,0	70,0	EN 13016-1 ^b
	kPa, max	60,0	70,0	80,0	90,0	95,0	100,0	
% evaporated at 70°C, E70	% (V/V), min	20,0	20,0	22,0	22,0	22,0	22,0	EN ISO 3405
	% (V/V), max	48,0	48,0	50,0	50,0	50,0	50,0	
% evaporated at 100°C, E100	% (V/V), min	46,0	46,0	46,0	46,0	46,0	46,0	EN ISO 3405
	% (V/V), max	71,0	71,0	71,0	71,0	71,0	71,0	
% evaporated at 150°C, E150	% (V/V), min	75,0	75,0	75,0	75,0	75,0	75,0	EN ISO 3405
Final Boiling Point FBP	°C, max	210	210	210	210	210	210	EN ISO 3405
Distillation residue	% (V/V), max	2	2	2	2	2	2	EN ISO 3405
Vapour Lock Index (VLI) (10 VP + 7 E70)	index, max	--	--	C --	D --	E --	F --	
Vapour Lock Index (VLI) (10 VP + 7 E70)	index, max			C1 1050	D1 1150	E1 1200	F1 1250	
^a NOTE Requirements in bold refer to the European Fuels Directive 98/70/EC [1], including subsequent Amendments [2], [3], [4] and [11]. ^b								
^a See also 5.7.1.								
^b Dry Vapour Pressure Equivalent (DVPE) shall be reported.								



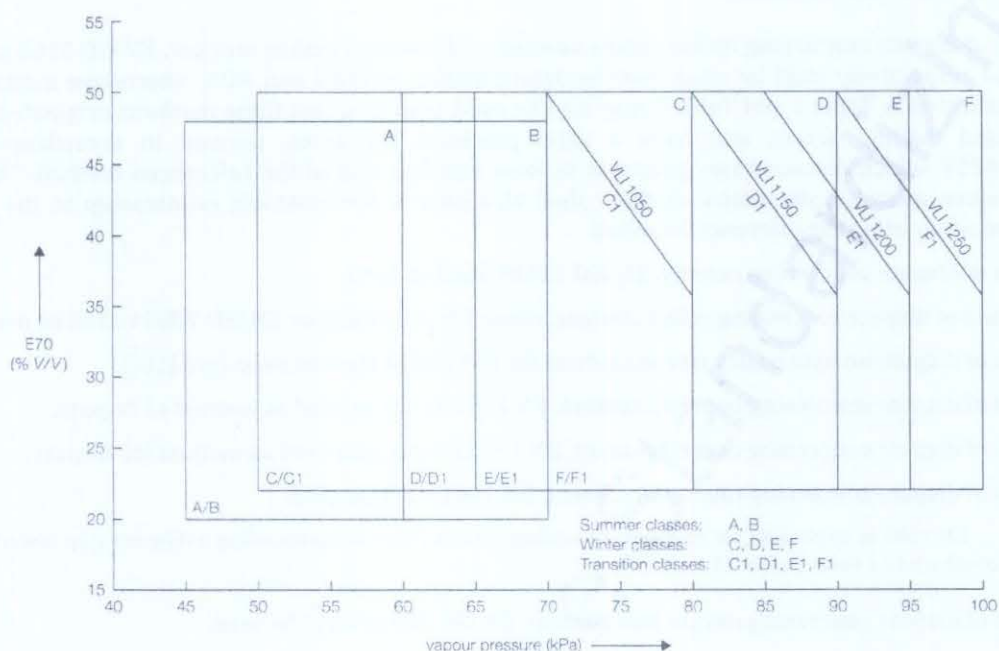


Figure 2 — Relation between VP, E70 and VLI for the ten different volatility classes for unleaded petrol with a maximum oxygen content of 2,7 % (m/m)

5.6 Octane reporting

To prevent any misinterpretation in the reported results, the following reporting is recommended:

- *RON_m*, being the measured Research Octane Number according to EN ISO 5164,
- *MON_m*, being the measured Motor Octane Number according to EN ISO 5163,
- *RON* and *MON* being the Research and Motor Octane properties, respectively, shall be reported after correction of *RON_m* and *MON_m* according to Formulae (1) and (2):

$$RON = RON_m - 0,2 \quad (1)$$

$$MON = MON_m - 0,2 \quad (2)$$

5.7 Precision and dispute

5.7.1 Resolution of disputes

All test methods referred to in this European Standard include a precision statement. In cases of dispute, the procedures for resolving the dispute and interpretation of the results based on test method precision, described in EN ISO 4259, shall be used.

5.7.2 Arbitration test methods

In cases of dispute concerning motor octane number and research octane number, EN ISO 5163 and EN ISO 5164 respectively shall be used. For the determination of MON and RON, alternative methods to those indicated in Table 1 and Table 2 may also be used, provided that these methods originate from a recognised method series, and have a valid precision statement, derived in accordance with EN ISO 4259, which demonstrates precision at least equal to that of the referenced method. The test result, when using an alternative method, shall also have a demonstrable relationship to the result obtained when using the referenced method.

In cases of dispute concerning density, EN ISO 12185 shall be used.

In the case of dispute concerning sulfur content, either EN ISO 20846 or EN ISO 20884 shall be used.

In cases of dispute on hydrocarbon type content, EN ISO 22854 shall be used (see [10]).

In cases of dispute concerning benzene content, EN 238 cannot be used as method of dispute.

In cases of dispute concerning oxygen content, EN 13132 cannot be used as method for dispute.

In cases of dispute concerning methanol content, EN 1601 shall be used.

NOTE EN 1601 is applicable for samples containing > 15 % (V/V) of ethers using a dilution step lowering the amount of ethers to a value below 15 % (V/V).

In cases of dispute concerning oxygenates content, EN ISO 22854 shall be used.



Annex A (normative)

Vapour pressure waiver

A.1 Vapour pressure waiver permitted

The permitted vapour pressure waiver for intermediate ethanol content between the values listed in Table A.1 shall be determined by a straight line interpolation between the ethanol content immediately above and that immediately below the intermediate value determined by the methods indicated in Table A.1.

Table A.1 — Vapour pressure waiver permitted for unleaded petrol containing bioethanol

Ethanol content EN 1601- EN 13132 — EN ISO 22854 ^a % (V/V)	Vapour Pressure Waiver Permitted EN 13016-1 kPa
0	0
1,0	3,7
2,0	6,0
3,0	7,2
4,0	7,8
5,0	8,0
6,0	8,0
7,0	7,9
8,0	7,9
9,0	7,8
10,0	7,8

^a See also 5.7.2.

A.2 Guidance for checking compliance with the permitted waiver

To correctly sample for vapour pressure compliance, EN 14275 shall be used






To verify the compliance with the permitted waiver, the following approach shall be followed.

- 1) Measure the ethanol content according to the test methods listed in Table A.1.
- 2) Get the rounded waivers corresponding to the measured ethanol content.
- 3) Apply the waiver to the maximum vapour pressure limit of EN 228 of the Class A volatility class (60,0 kPa) as defined in Table 3 and obtain a new waiver limit.

- 4) Perform the vapour pressure measurement according to EN 13016-1, using the 1 l container procedure.
- 5) Compare the results obtained under 3 and 4.
- 6) The interpretation of results and the verification of the compliance shall be performed according to EN ISO 4259.



Bibliography

- [1] Directive 98/70/EC of the European Parliament and of the Council of 13 October 1998 relating to the quality of petrol and diesel fuels and amending Council Directive 93/12/EEC
- [2] Directive 2003/17/EC of the European Parliament and of the Council of 3 March 2003 amending Directive 98/70/EC relating to the quality of petrol and diesel fuels and amending Council Directive 93/12/EEC
- [3] Directive 2009/30/EC of the European Parliament and of the Council of 23 April 2009 amending Directive 98/70/EC as regards the specification of petrol, diesel and gas oil and introducing a mechanism to monitor and reduce greenhouse gas emissions and amending Council Directive 1999/32/EC as regards the specification of fuel used by inland waterway vessels and repealing Directive 93/12/EEC
- [4] Directive 2011/63/EU of the European Parliament and of the Council of 1 June 2011 amending, for the purpose of its adaptation to technical progress, Directive 98/70/EC of the European Parliament and of the Council relating to the quality of petrol and diesel fuels
- [5] CEN/TR 16435, *Liquid petroleum products - Oxygenates blending in line with actual EN 228 requirements*
- [6] CONCAWE report 08/03, *Guidelines for blending and handling motor gasoline containing up to 10 % V/V ethanol*, available from www.concawe.org.
- [7] CEN/TR 15367-2, *Petroleum products - Guide for good housekeeping - Part 2: Automotive petrol fuels*
- [8] CEN/TR 15367-3, *Petroleum products - Guide for good housekeeping - Part 3: Prevention of cross contamination*
- [9] Method 13, *Determination of ¹⁴C content in ethanol, Annex I of Commission Regulation (EC) No. 625/2003, of 2 April 2003, amending Regulation (EC) No 1623/2000 laying down detailed rules for implementing Council Regulation (EC) No 1493/1999 on the common organization of the market in wine with regards to market mechanism.*
- [10] CEN/TR 15745, *Liquid petroleum products - Determination of hydrocarbon types and oxygenates via multidimensional gas chromatography method - Round Robin research report*
- [11]  Commission Directive 2014/77/EU of 10 June 2014 amending Annexes I and II of Directive 98/70/EC of the European Parliament and of the Council relating to the quality of petrol and diesel fuels 
- [12]  Directive 2014/94/EU of the European Parliament and of the Council of 22 October 2014 on the deployment of alternative fuels infrastructure 
- [13]  Directive 2009/28/EC of the European Parliament and of the Council of 23 April 2009 on the promotion of the use of energy from renewable sources and amending and subsequently repealing Directives 2001/77/EC and 2003/30/EC 