



MANHOLE
PL1

General Layout, Plan View / Planimetria (PL1)
Sc. 1:50

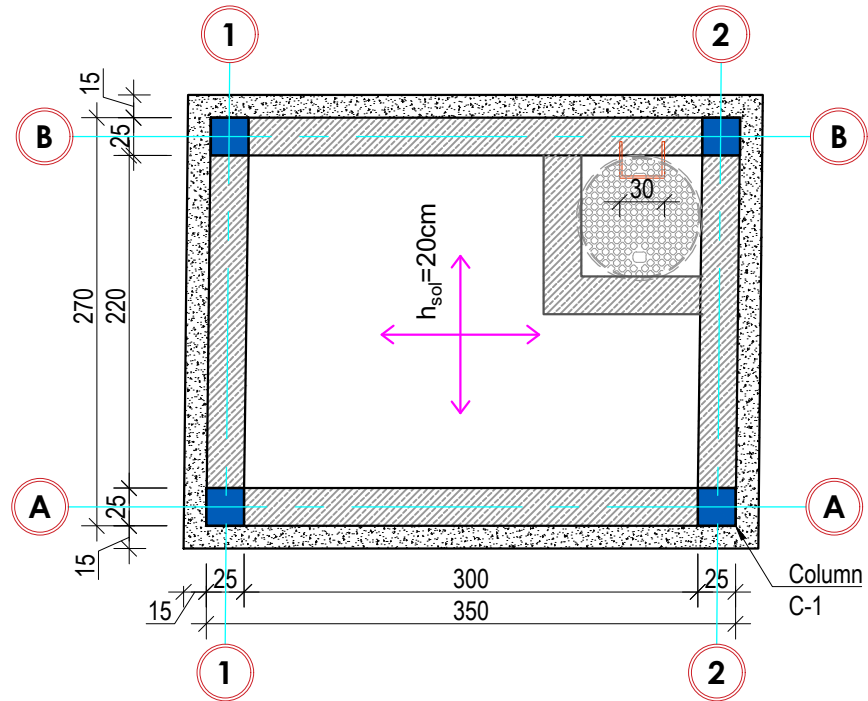

(PUSETA & WASH OUT) or (PL1)

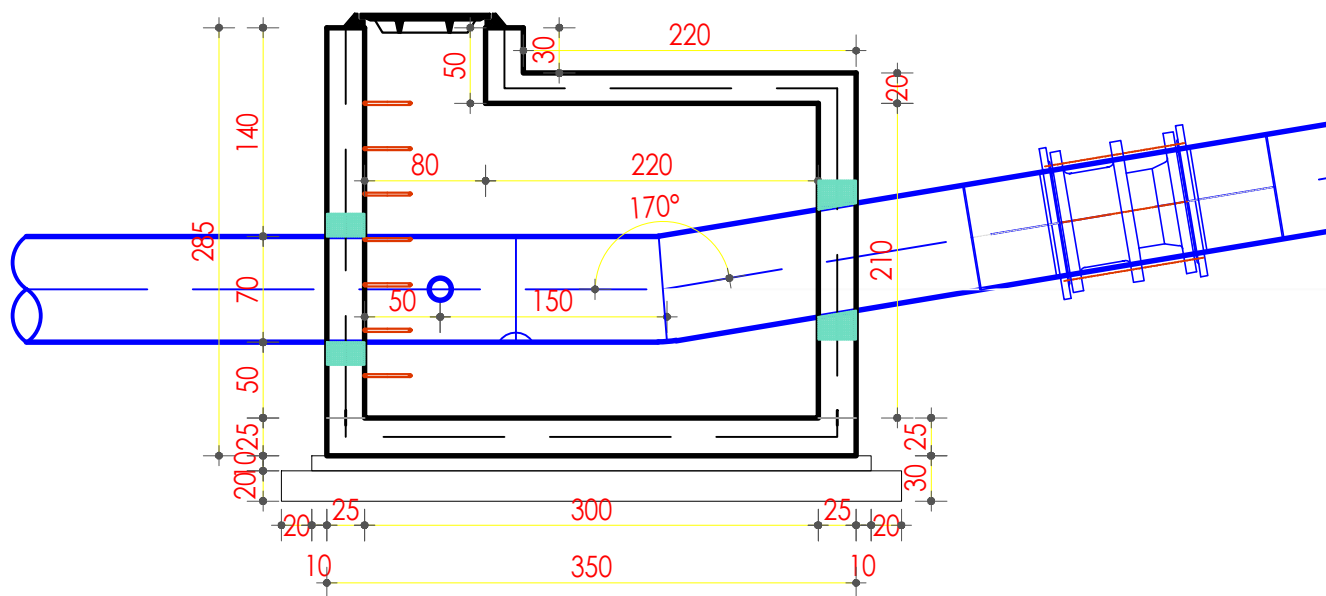

Shenime Teknike:

Elementet Structurale jane projektuar me keto materiale:

Pllaka e Pusetes:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtëse=5.0cm, Klasa e ekspozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Kollonat:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$,
Shtresa mbrojtese=4.0cm,Klasa e ekspozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Traret:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$,
Shtresa mbrojtëse=3.5.0cm,Klasa e ekspozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Soletat:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$,
Shtresa mbrojtëse=3.0cm,Klasa e ekspozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Technical Notes:

Structural elements are calculated and designed with following characteristics:

Base Slab is designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$ Rebar cover=5.0cm
-Exposure Class: XC

- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Columns, Walls and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor


- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Top Slab and Beams are designed with:


- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$ Rebar cover=3.5cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

MANHOLE
PL1

Foundation Reinforcement, Plan View /
Armimi i Pllakës së themelit Planimetria (PL1)
Sc. 1:50

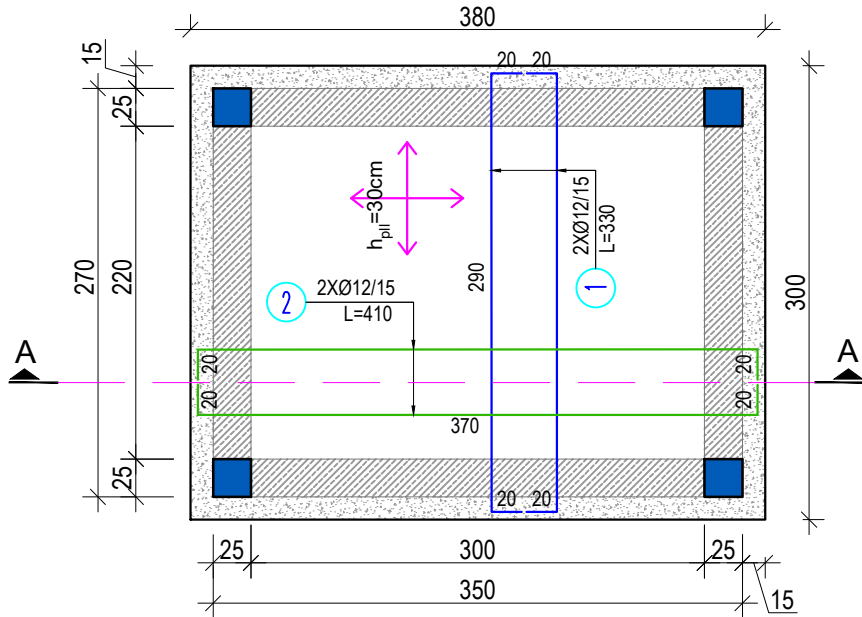

Base Slab Reinforcement Section A-A/
Armimi i Themelit Prerja A-A
Sc. 1:50

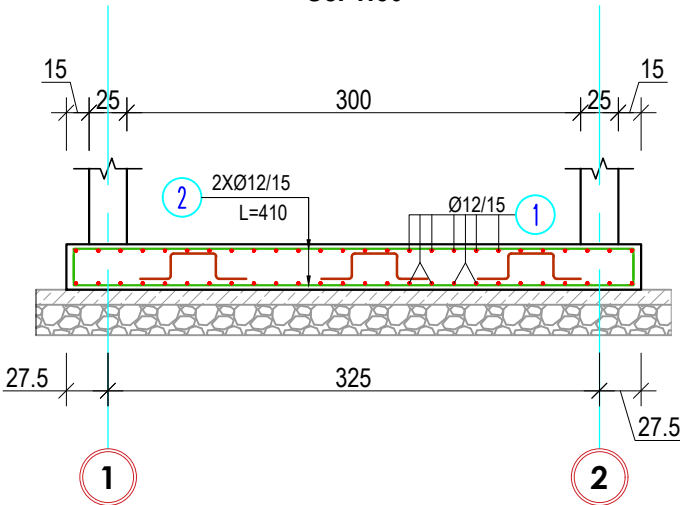

Shenime Teknike:

Elementet Structurale jane projektuar me keto materiale:

Pllaka e Pusetes:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtëse=5.0cm, Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Kollonat:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtëse=4.0cm, Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Traret:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtëse=3.5.0cm, Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Soletat:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtëse=3.0cm, Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Technical Notes:

Structural elements are calculated and designed with following characteristics:

Base Slab is designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$
- Rebar cover=5.0cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Columns , Walls and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$
- Rebar cover=4.0cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Top Slab and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$
- Rebar cover=3.5cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

Investitor / Investor:

ALBSTAR
Adresa: Blvd. Dëshmorët e Kombit;
Twin Towers, Kulla 2, kati 5/1;
Tiranë, Albania



Projektuesi / Designer:

Departamenti i Projektimit "ALBSTAR"
Adresa: Blvd. Dëshmorët e Kombit;
Twin Towers, Kulla 2, kati 5/1;
Tiranë, Albania



Titulli i Projektit / Project Title:

MUNICIPAL INFRASTRUCTURE PROGRAMME III
CONSTRUCTION OF SEWERAGE AND WATER SUPPLY
NETWORK BERAT AND KUCOVA
(RRESHQITJA "POLICAN-BERAT")

Titulli i Dokumentit / Document Title:

PROJEKT ZBATIMI / EXECUTION DESIGN
Strukturë - Armimi i Pusëtës PL1
Faqe 02 nga 07 - Armimi Puseta PL1


Document Code

Company	Section	Main Task	Group	Number	Revision
AS	ST	BA	PL	001	00


Nr. Viz / No. Dwg	Document Number:
A2	AS-ST-BA-PL-02-00

00	04/08/2021	Për komente/ For comments	FE	DJ	DJ
Revision Status	Date	Description	Prepared	Checked	Approved

MANHOLE
PL1

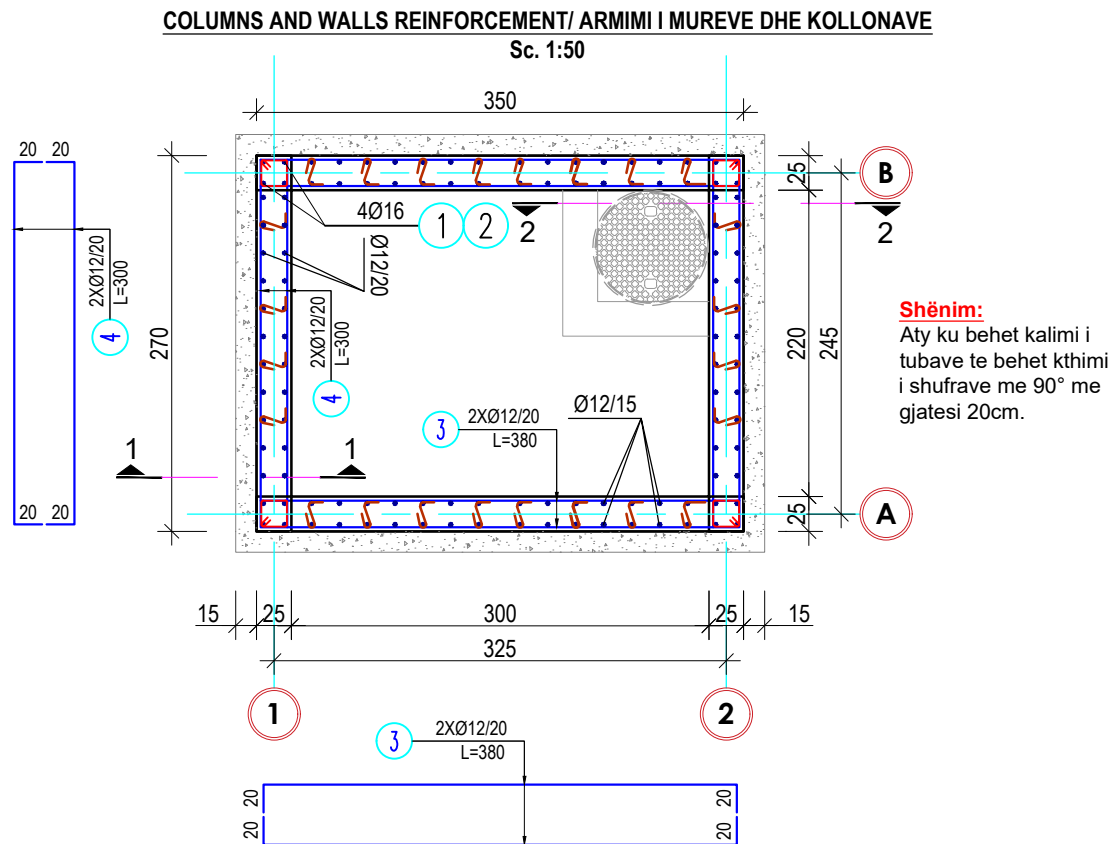

Shënim:
Të kontrollohet lartesia e Pusetës sipas rastit perkates përpara zbatimit te Punimeve. Rasti konkret eshte armuar per lartësi 2m.

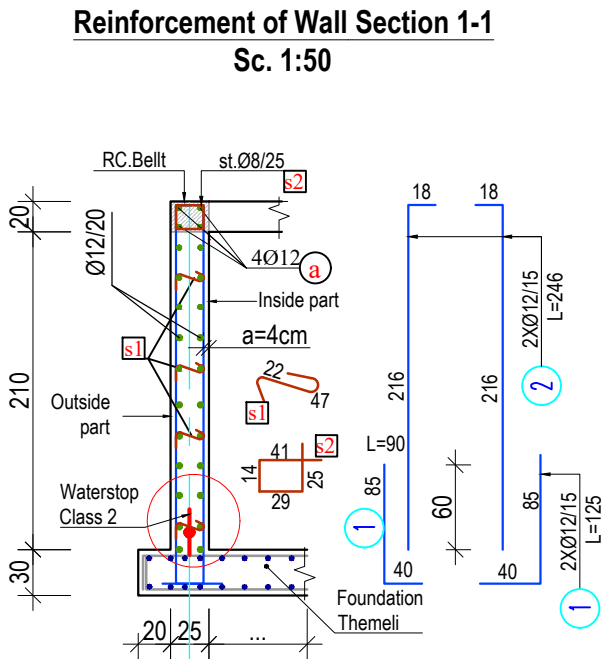

Shenime Teknike:

Elementet Structurale jane projektuar me keto materiale:

Pllaka e Pusetes:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtëse=5.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Kollonat:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtëse=4.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Traret:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtëse=3.5.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Soletat:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtëse=3.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Technical Notes:

Structural elements are calculated and designed with following characteristics:

Base Slab is designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$ Rebar cover=5.0cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Columns , Walls and Beams are designed with:


- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$ Rebar cover=4.0cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Top Slab and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$ Rebar cover=3.5cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

Reinforcement of Wall Section 2-2


Sc. 1:50

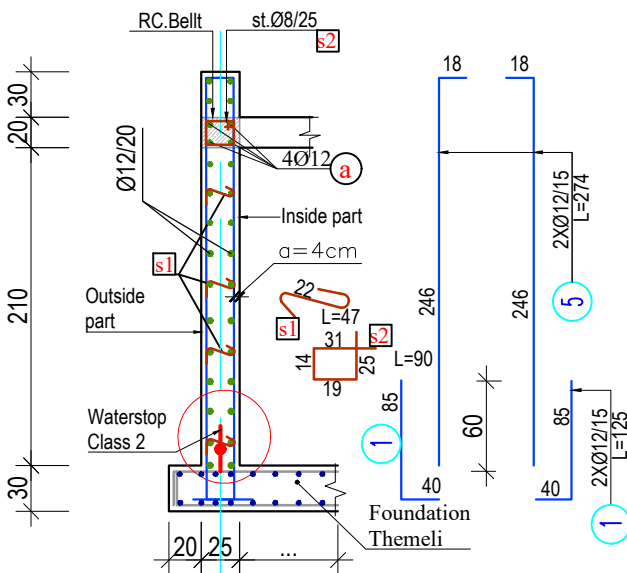

Investitor / Investor:		Projektuesi / Designer:		Titulli i Projektit / Project Title:		Titulli i Dokumentit / Document Title:		Document Code				Scale:			
ALBSTAR		Departamenti i Projektimit "ALBSTAR"		MUNICIPAL INFRASTRUCTURE PROGRAMME III		PROJEKT ZBATIMI / EXECUTION DESIGN		Company				SH 1:50			
Adresa: Blvd. Dëshmorët e Kombit;		Adresa: Blvd. Dëshmorët e Kombit;		CONSTRUCTION OF SEWERAGE AND WATER SUPPLY		Strukturë - Armimi i Pusetës PL1		AS							
Twin Towers, Kulla 2, kati 5/1;		Twin Towers, Kulla 2, kati 5/1;		NETWORK BERAT AND KUCOVA		Faqe 03 nga 07 - Armimi Pusetë PL1		ST							
Tiranë, Albania		Tiranë, Albania		(RRESHQITJA "POLICAN-BERAT")				BA							
								PL							
								001							
								Revision							
								00							
								04/08/2021							
								Për komente/ For comments							
								FE							
								Dj							
								Dj							
								Format:				A3			
								Revision							
								Status							
								Description							
								Prepared							
								Checked							
								Approved							


MANHOLE
PL1

Slab Reinforcement/ Armimi i Soletës (PL1)
Sh. 1:50

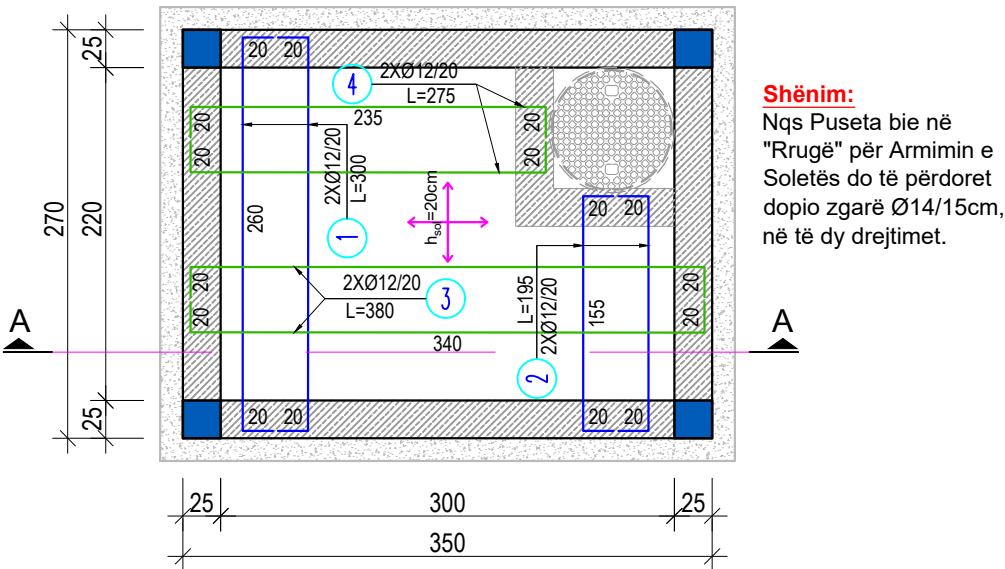


Shënim:
Nqs Puseta bie në "Rrugë" për Armimin e Soletës do të përdoret dopio zgarë Ø14/15cm, në të dy drejtimet.

Beam B-1 Reinforcement/ Armimi i traut B-1
Sc. 1:50

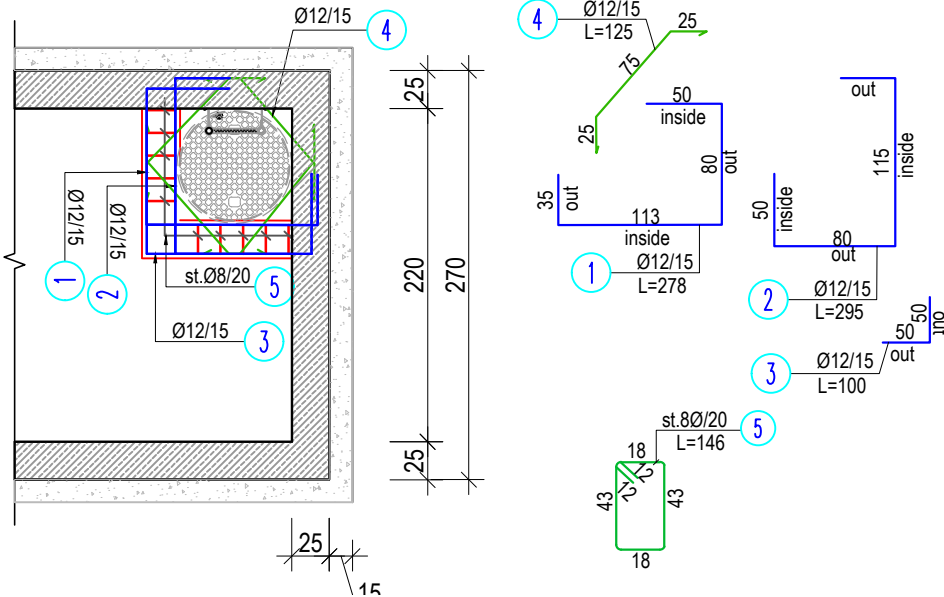

Detaj i Vrimës në Soletë Prerja A-A
Sc. 1:25

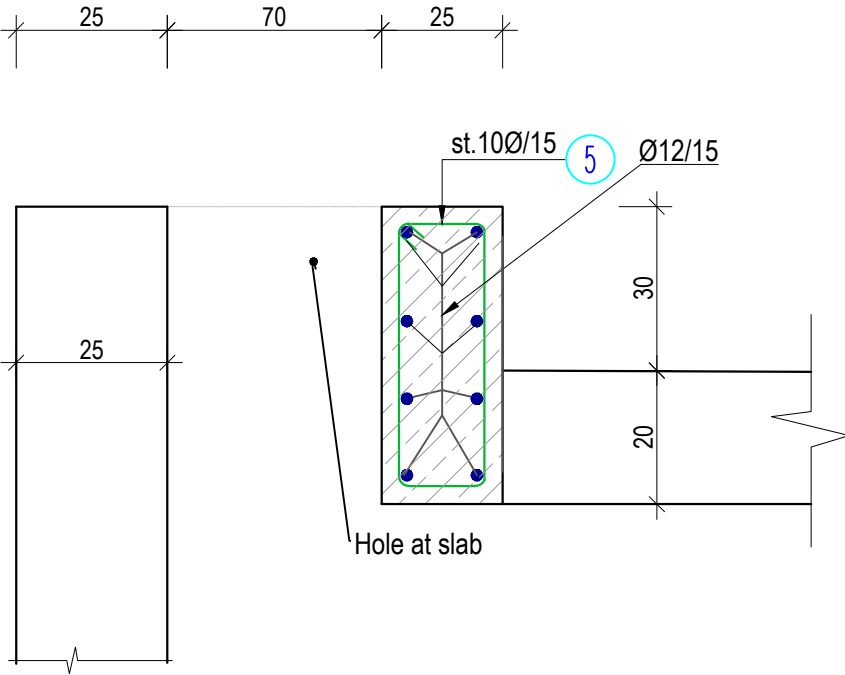

Technical Notes:

Structural elements are calculated and designed with following characteristics:

Base Slab is designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$
- Rebar cover=5.0cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Columns , Walls and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$
- Rebar cover=4.0cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Top Slab and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$
- Rebar cover=3.5cm
- Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

Shenime Teknike:

Elementet Structurale jane projektuar me keto materiale:

Pllaka e Pusetes:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtese=5.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Kollonat:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtese=4.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Traret:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtese=3.5.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Soletat:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$, Shtresa mbrojtese=3.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Investitor / Investor:

ALBSTAR
Adresa: Blvd. Dëshmorët e Kombit;
Twin Towers, Kulla 2, kati 5/1;
Tiranë, Albania



Projektuesi / Designer:

Departamenti i Projektimit "ALBSTAR"
Adresa: Blvd. Dëshmorët e Kombit;
Twin Towers, Kulla 2, kati 5/1;
Tiranë, Albania



Titulli i Projektit / Project Title:

MUNICIPAL INFRASTRUCTURE PROGRAMME III
CONSTRUCTION OF SEWERAGE AND WATER SUPPLY
NETWORK BERAT AND KUCOVA
(RRESHQITJA "POLICAN-BERAT")

Titulli i Dokumentit / Document Title:

PROJEKT ZBATIMI / EXECUTION DESIGN
Strukturë - Armimi i Pusëtës PL1
Faqe 04 nga 07 - Armimi Puseta PL1

Document Code

Company	Section	Main Task	Group	Number	Revision
AS	ST	BA	PL	001	00

Nr. Viz / No. Dwg

A2

Document Number:

AS-ST-BA-PL-04-00

00

04/08/2021

Revision Status

Date

Për komente/ For comments

FE

DJ

DJ

Approved

Prepared

Checked

Format:


A3

Scale:


SH 1:50

MANHOLE
PL1


Column C-1/ Kollona C-1 (4 pieces/ copë)
Sc 1:50

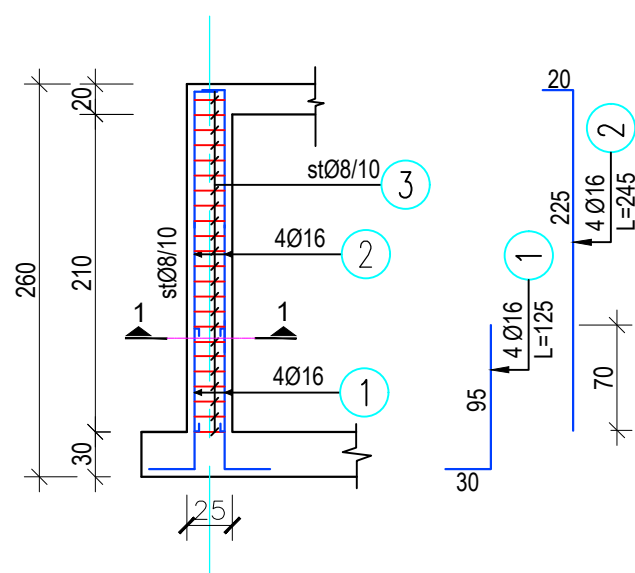


Section 1-1, Prerja 1-1, C-1
Sc. 1:50

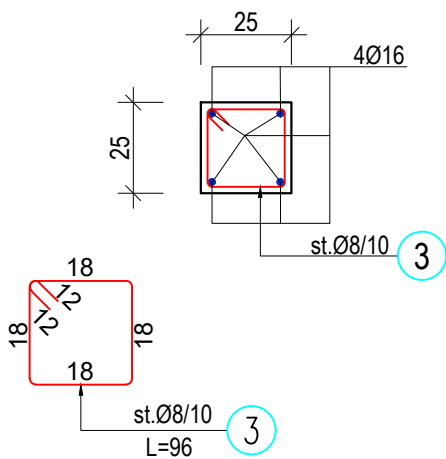


Placement of stirrup in rc wall/
Vendosja e stafave ne murin b/a
Sc. 1:50

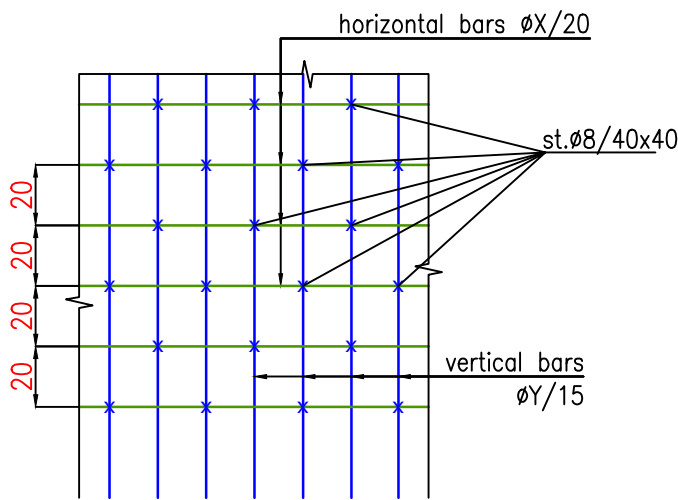

Typical Rc.wall Section/ Seksion tip i murit b/a
Sc. 1:50

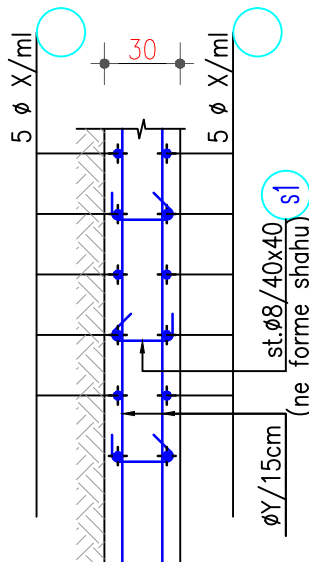

Typical Detail of Openings through Rc Walls/ Detaj i vrimave ne murin b/a
Sc. 1:50

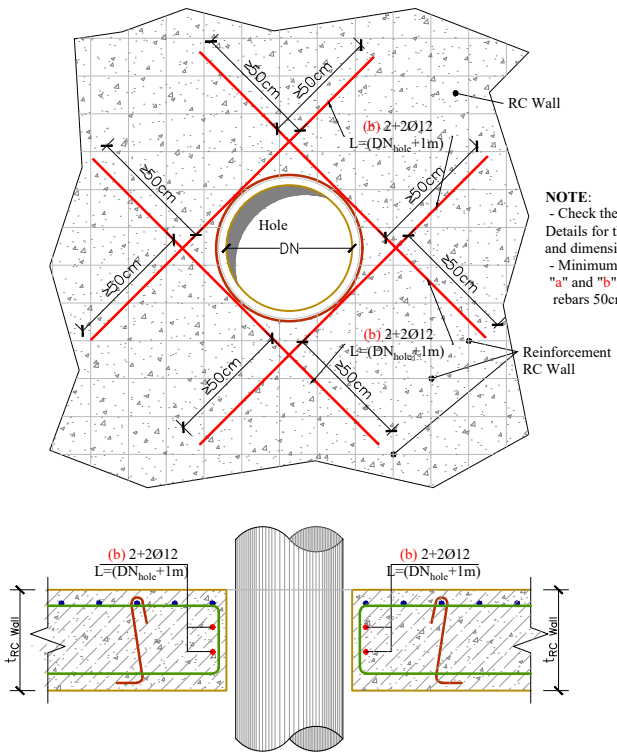

Technical Notes:

Structural elements are calculated and designed with following characteristics:

Base Slab is designed with:

-Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$ Rebar cover=5.0cm

-Exposure Class: XC

- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Columns , Walls and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$ Rebar cover=4.0cm

-Exposure Class: XC

- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Top Slab and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000\text{kN/m}^2$) with safety factor $\gamma_c=1.5$ Rebar cover=3.5cm

-Exposure Class: XC

- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

Shenime Teknike:

Elementet Strukturele jane projektuar me keto materiale:

Pllaka e Pusetes:

- Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$,

Shtresa mbrojttese=5.0cm,Klasa e expozimit XC

- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Kollonat:

-Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$,

Shtresa mbrojttese=4.0cm,Klasa e expozimit XC

- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Traret:

-Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$,

Shtresa mbrojttese=3.5.0cm,Klasa e expozimit XC

- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Soletat:

-Betoni C-25/30 ($f_{ck}=25000\text{kN/m}^2$) me koef. sigurie $\gamma_c=1.5$,

Shtresa mbrojttese=3.0cm,Klasa e expozimit XC

- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Investitor / Investor:

ALBSTAR
Adresa: Blvd. Dëshmorët e Kombit;
Twin Towers, Kulla 2, kati 5/1;
Tiranë, Albania



Projektuesi / Designer:

Departamenti i Projektimit "ALBSTAR"
Adresa: Blvd. Dëshmorët e Kombit;
Twin Towers, Kulla 2, kati 5/1;
Tiranë, Albania



Titulli i Projektit / Project Title:

MUNICIPAL INFRASTRUCTURE PROGRAMME III
CONSTRUCTION OF SEWERAGE AND WATER SUPPLY
NETWORK BERAT AND KUCOVA
(RRESHQITJA "POLICAN-BERAT")

Titulli i Dokumentit / Document Title:

PROJEKT ZBATIMI / EXECUTION DESIGN
Strukturë - Armimi i Pusëtës PL1
Faqe 05 nga 07 - Armimi Puseta PL1

Document Code

Company	Section	Main Task	Group	Number	Revision
AS	ST	BA	PL	001	00

Nr. Viz / No. Dwg	Document Number:	00	04/08/2021	Për komente/ For comments	FE	DJ	DJ
A2	AS-ST-BA-PL-05-00	Revision Status	Date	Description	Prepared	Checked	Approved

Scale:


SH 1:50

Format:


A3

MANHOLE
PL1

Waterstop detail, reinforcement
for protection, of waterstop
Sc.1:20

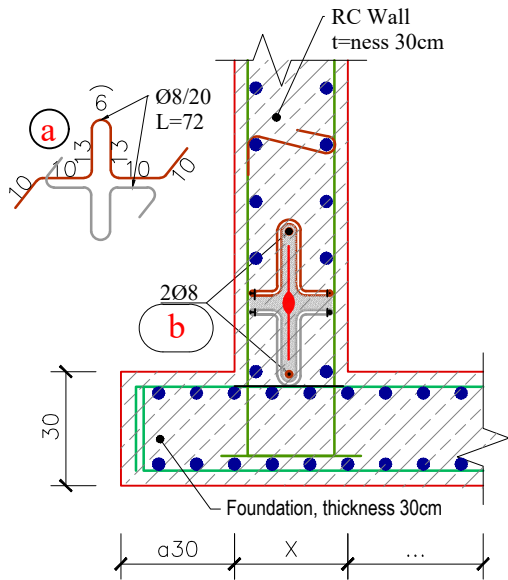

Typical Detail of Plate
Sc.1:20

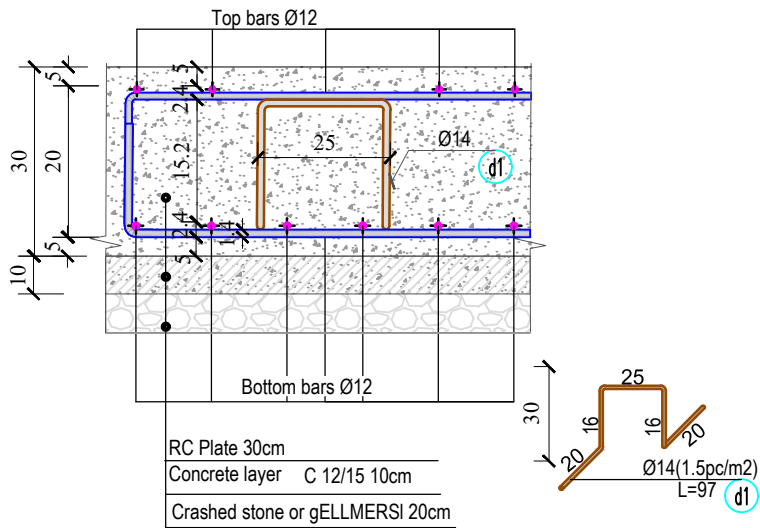

Technical Notes:

Structural elements are calculated and designed with following characteristics:

Base Slab is designed with:

-Concrete C-25/30 ($f_{ck}=25000kN/m^2$) with safety factor $\gamma_c=1.5$ Rebar cover=5.0cm

-Exposure Class: XC

- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Columns , Walls and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000kN/m^2$) with safety factor $\gamma_c=1.5$ Rebar cover=4.0cm

-Exposure Class: XC

- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

RC. Top Slab and Beams are designed with:

- Concrete C-25/30 ($f_{ck}=25000kN/m^2$) with safety factor $\gamma_c=1.5$ Rebar cover=3.5cm

-Exposure Class: XC

- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

Shenime Teknike:

Elementet Structurale jane projektuar me keto materiale:

Pllaka e Pusetes:

- Betoni C-25/30 ($f_{ck}=25000kN/m^2$) me koef. sigurie $\gamma_c=1.5$,

Shtresa mbrojttese=5.0cm,Klasa e expozimit XC

- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Kollonat:

-Betoni C-25/30 ($f_{ck}=25000kN/m^2$) me koef. sigurie $\gamma_c=1.5$,

Shtresa mbrojttese=4.0cm,Klasa e expozimit XC

- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Traret:

-Betoni C-25/30 ($f_{ck}=25000kN/m^2$) me koef. sigurie $\gamma_c=1.5$,

Shtresa mbrojttese=3.5.0cm,Klasa e expozimit XC

- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Soletat:

-Betoni C-25/30 ($f_{ck}=25000kN/m^2$) me koef. sigurie $\gamma_c=1.5$,

Shtresa mbrojttese=3.0cm,Klasa e expozimit XC

- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$

Investitor / Investor:

ALBSTAR

Adresa: Blvd. Dëshmorët e Kombit;
Twin Towers, Kulla 2, kati 5/1;
Tiranë, Albania



Projektuesi / Designer:

Departamenti i Projektimit "ALBSTAR"

Adresa: Blvd. Dëshmorët e Kombit;
Twin Towers, Kulla 2, kati 5/1;
Tiranë, Albania



Titulli i Projektit / Project Title:

MUNICIPAL INFRASTRUCTURE PROGRAMME III
CONSTRUCTION OF SEWERAGE AND WATER SUPPLY
NETWORK BERAT AND KUCOVA
(RRESHQITJA "POLICAN-BERAT")

Titulli i Dokumentit / Document Title:

PROJEKT ZBATIMI / EXECUTION DESIGN
Strukturë - Armimi i Pusëtës PL1
Faqe 06 nga 07 - Armimi Puseta PL1

Document Code

Company	Section	Main Task	Group	Number	Revision
AS	ST	BA	PL	001	00

Nr. Viz / No. Dwg	Document Number:
A2	AS-ST-BA-PL-06-00

00	04/08/2021	Për komente/ For comments	FE	DJ	DJ
Revision Status	Date	Description	Prepared	Checked	Approved

Scale:	SH 1:50
Format:	A3

MANHOLE
PL1

ELEMENT		REINFORC.STEEL SPECIFICATION					REINF.STEEL FOR 1 ELEM				TOTALE kg.	
TYPE	PC	Nr.	Ø	Lcm	QUA	Lml	Ø	Lml	Sp.WEIGHT	WEIGHT	WEIGHT	
BASE SLAB	1	1	12	330	52	171.6	8	0	0.4	0.00	Ø≤10	
		2	12	410	40	164					0.0	
		3	12	0	0	0	12	347.6	0.89	308.60	Ø>10	
		4	12	0	0	0	14	0	1.21	0.00	308.6	
		5	12	0	0	0				308.60		
		6	12	0	0	0						
		Dis.	12	100	12	12						
COLUMN C-1	4	1	16	125	4	5	8	22.08	0.4	8.71	Ø≤10	
		2	16	245	4	9.8					34.8	
		3	8	96	23	22.08	16	14.8	1.58	23.36	Ø>10	
											93.4	
TOP SLAB	1	1	12	300	30	90	8	0	0.4	0.00	Ø≤10	
		2	12	195	12	23.4					0.0	
		3	12	380	26	98.8	12	245.2	0.89	217.69	Ø>10	
		4	12	275	12	33					217.7	
WALLS VERTICAL AND HORIZONTAL BARS	1	1	12	125	124	155	8	98	0.4	38.67	Ø≤10	
		2	12	246	96	236.16					38.7	
		3	12	380	44	167.2	12	816.68	0.89	725.04	Ø>10	
		4	12	300	44	132					725.0	
		5	12	274	28	76.72						
		S1	8	40	110	44						
		S2	8	90	60	54						
		Beam	12	tot	ml	49.6						

Technical Notes:

Structural elements are calculated and designed with following characteristics:
Base Slab is designed with:
-Concrete C-25/30 (fck=25000kN/m²) with safety factor $\gamma_c=1.5$
Rebar cover=5.0cm
-Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$
RC. Columns , Walls and Beams are designed with:
- Concrete C-25/30 (fck=25000kN/m²) with safety factor $\gamma_c=1.5$
Rebar cover=4.0cm
-Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$
RC. Top Slab and Beams are designed with:
- Concrete C-25/30 (fck=25000kN/m²) with safety factor $\gamma_c=1.5$
Rebar cover=3.5cm
-Exposure Class: XC
- Reinforcement "B 500" with safety factor $\gamma_s=1.15$

Shenime Teknike:

Elementet Structurale jane projektuar me keto materiale:
Pllaka e Pusetes:
- Betoni C-25/30 (fck=25000kN/m²) me koef. sigurie $\gamma_c=1.5$,
Shtresa mbrojtese=5.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$
Kollonat:
-Betoni C-25/30 (fck=25000kN/m²) me koef. sigurie $\gamma_c=1.5$,
Shtresa mbrojtese=4.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$
Traret:
-Betoni C-25/30 (fck=25000kN/m²) me koef. sigurie $\gamma_c=1.5$,
Shtresa mbrojtese=3.5.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$
Soletat:
-Betoni C-25/30 (fck=25000kN/m²) me koef. sigurie $\gamma_c=1.5$,
Shtresa mbrojtese=3.0cm,Klasa e expozimit XC
- Hekuri "B 500" me faktor sigurie $\gamma_s=1.15$