
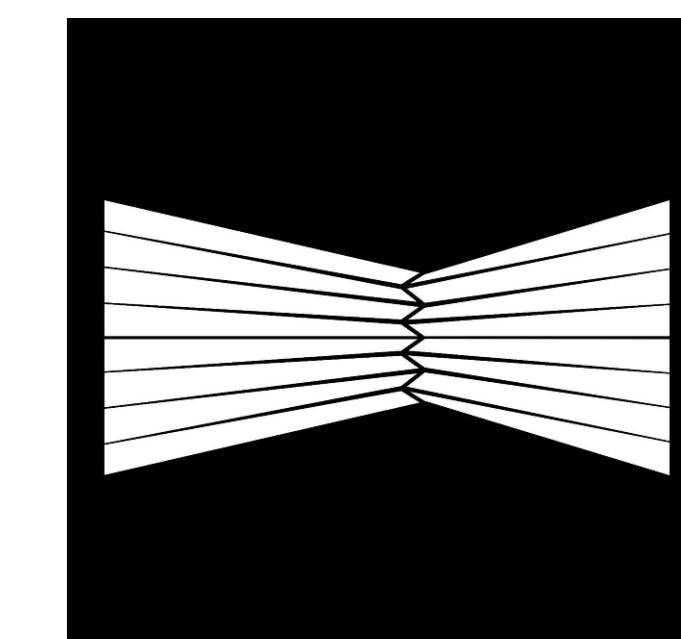
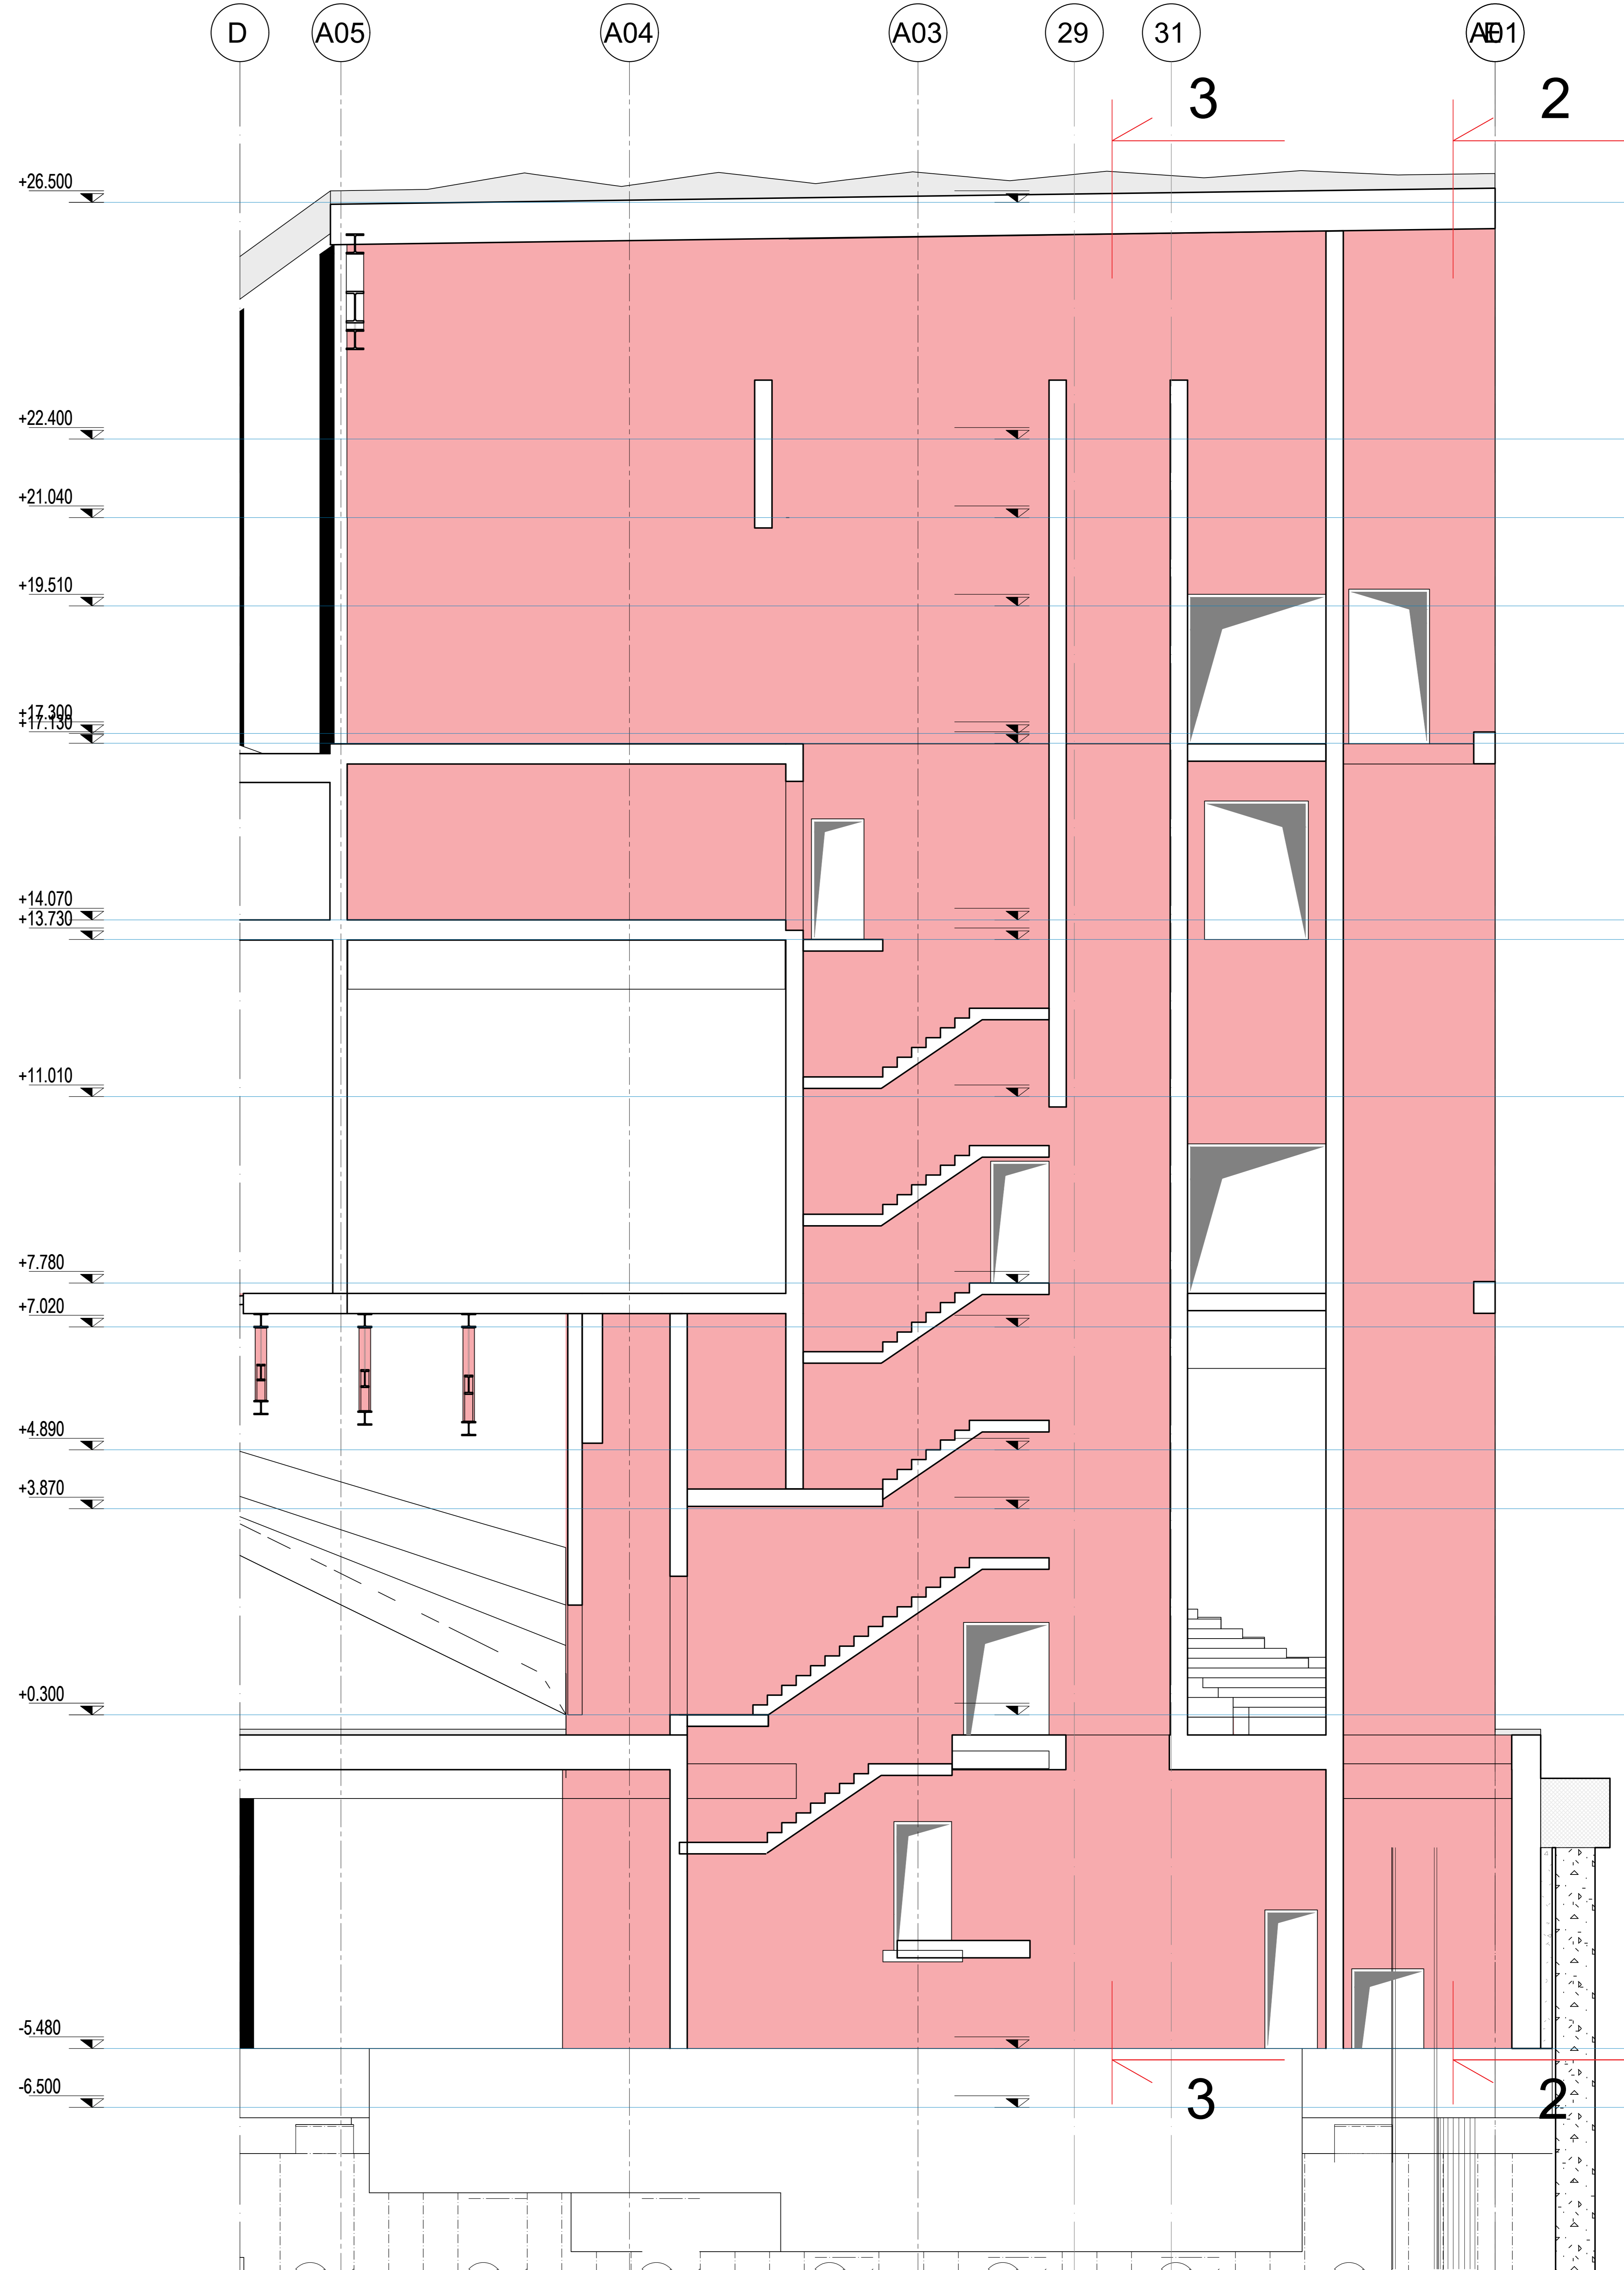


TABELA E HEKURIT

REINFORCEMENT TABLE OF WALLS TABELA E ARMIMIT TE MUREVE								
No. Position Nr. Pozicioni	Diameter Diametri [mm]	Length Gjatesia [cm]	Quantity Sasia [pieces]	Total Length Gjatesia tot. [m]	Total Reinforcement / Armimi total			
					Diameter Diametri [mm]	Total Length Gjatesia tot. [m]	Steel Weight Pesha e shufres [kg/m]	Total Weight Pesha tot. [ton]
1	20	600	40	240.00	20	8352.32	2.466	20.598
2	20	800	40	320.00				
3	20	700	40	280.00				
4	20	700	40	280.00				
5	20	600	40	240.00				
6	20	400	40	160.00				
7	20	400	40	160.00				
8	20	600	40	240.00				
9	20	400	40	160.00				
10	20	400	40	160.00				
11	20	400	40	160.00				
12	20	400	40	160.00				
13	20	400	40	160.00				
14	20	400	40	160.00				
15	20	600	40	240.00				
16	20	600	40	240.00				
17	20	350	40	140.00				
18	20	450	40	180.00				
19	20	1488	314	4672.32				
Total length				8352.32				

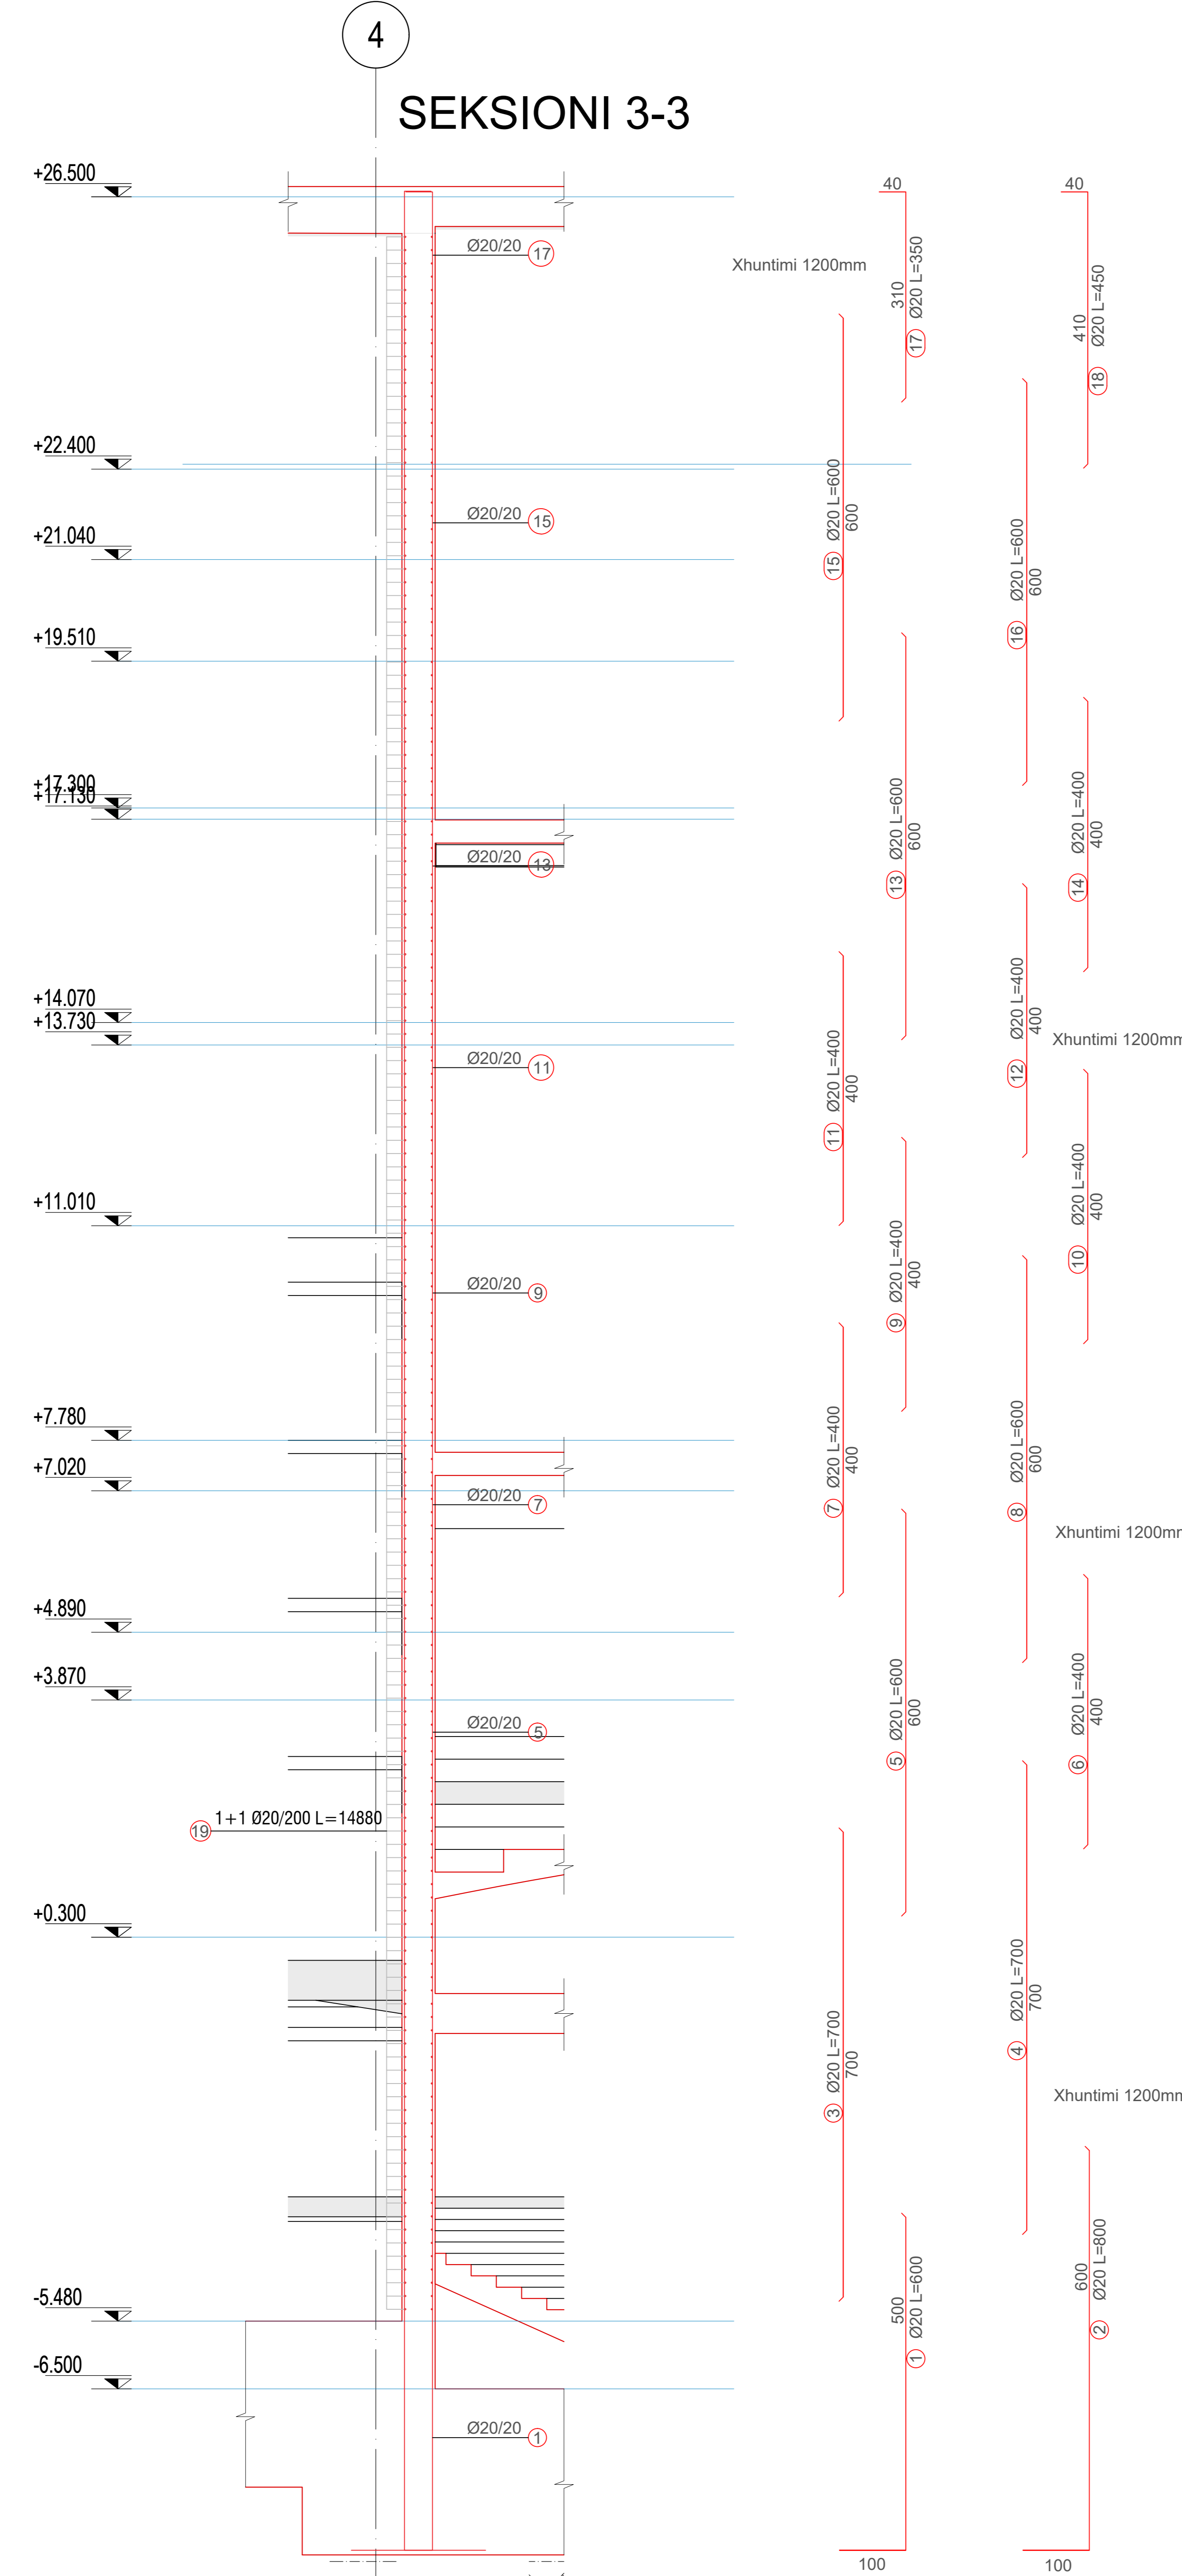

A&E ENGINEERING A&E ENGINEERING sh.p.k

Studio Konsulente
F&M INGENIERIA S.p.a.
Via Belvedere 8/10
30035 Mirano (VE)
tel 041-5785711
fax 041-4355933

PROJEKT	P. KAJMAKU
Q. ZOTO	
M. HALILAJ	
E. CANO	
V. HOXHA	
D. BLET	
E. CANO	
N. DASHI	
V. AVDA	
V. HOXHA	
A. BONAVENTURA	
A. C. NUZZO	
G. CHARALAMPOPOULOS	
A. MAGRINI	

"Godina e Teatrit Tiranë", Faza I-rë

PROJEKTI KONSTRUKTIV

Armimi i Murit

S-50_18

DATA: 01/10/2018
SHALLA: 1/10/2018