

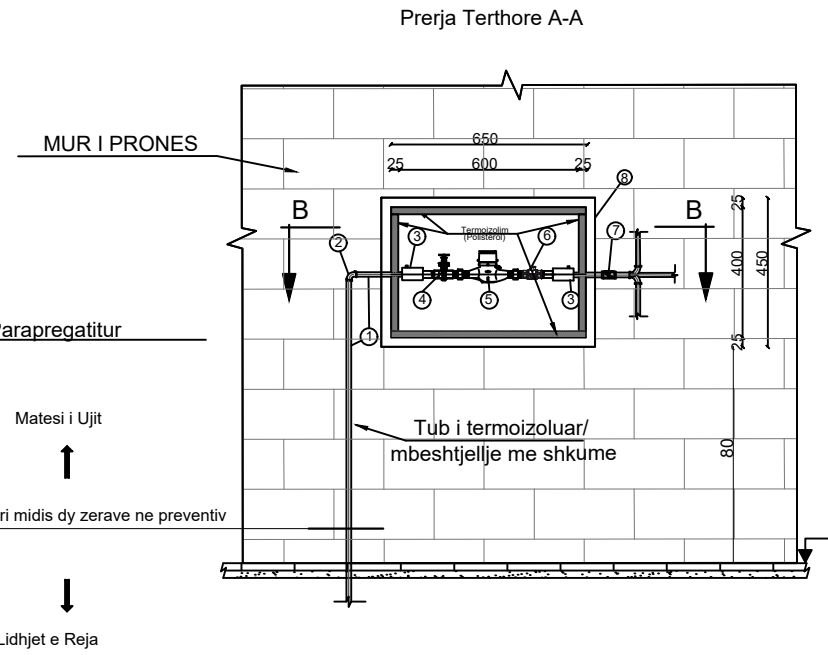


INSTALIMI I MATESIT TE UJIT INDIVIDUAL

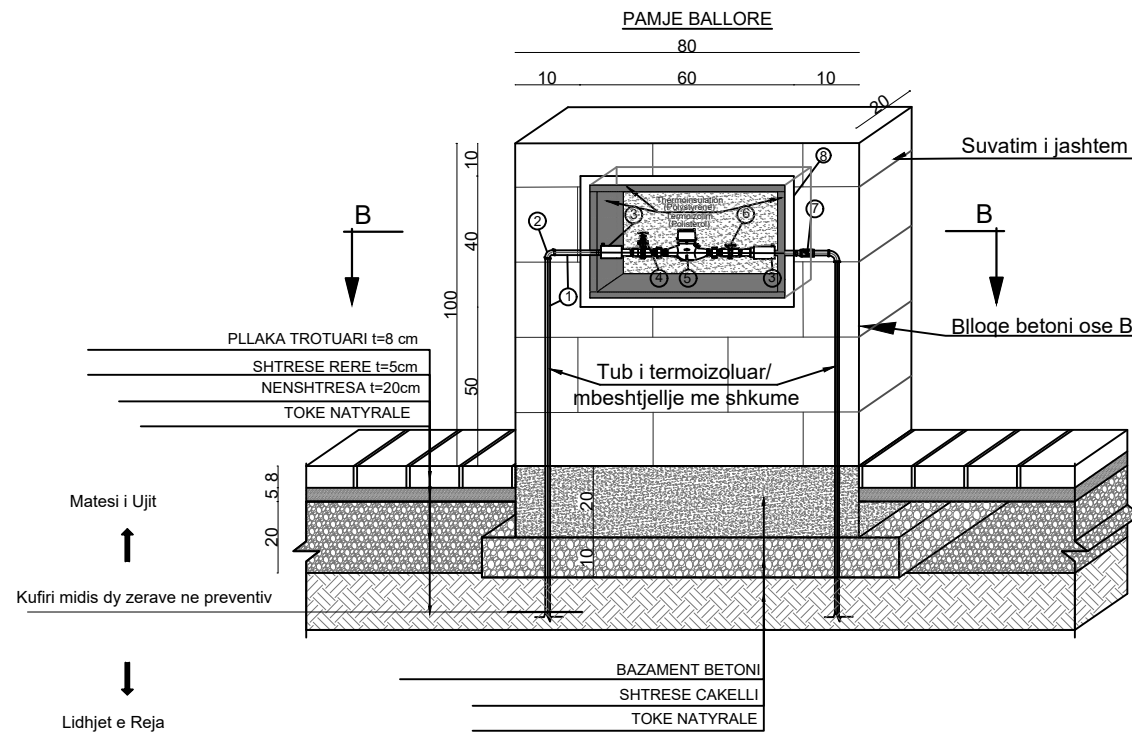

Prerja Terthore B - B

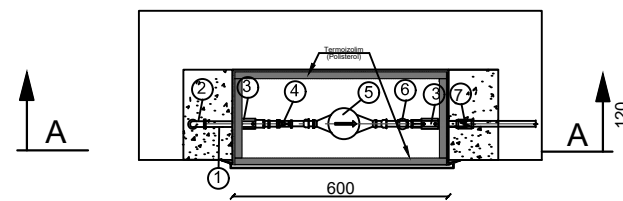

*) Shënim: Në presionin > 6.5 bar duhet të instalohet një PRV individuale. Pozicioni sipas STD 007.

Nr	Pershkrimi	Njesia	Sasia
1	Tub HDPE OD20 (me shufra)	ml	variabel
2	Bryll elektro fuziv OD 20	cope	1
3	Adaptor EF mashkull i filetuar OD 20/1/2"	cope	2
4	Saracineske Bronxi Dn15, dopio femer filetuar + volant	cope	1
5	Mates Uji Dn 15, Q ₃ =2.5m ³ /h perfshire Hollandez mashkull/femer filetuar Dn15	cope	1
6	Kundralvalvul Bronxi DN25	cope	1
7	Aksesor tranzit qe varet tubi ekzistues OD20/ODxx	cope	1
8	Kuti metalik me mbyllje	cope	1
*)	Valvul per reduktim presioni DN 15 Individuale (Presioni>6.5 bar)	cope	1

Rishikimet		KONTROLLUAR NGA		APROVUAR NGA	
1	KUSHTET 2024	S.G.O	F.M		PER MIRATIME
Bodmi	Data	PERGATITUR NGA	Kontrolluar nga	Aprovuar nga	Pershkrimi
		PERGATITUR NGA		APROVUAR NGA	
		FAHRI MAHO		DATA	
BOTIMI		SHKALLA		DATA	
1		1:75			
NUMRI I VIZATIMIT		FU-DE-M.U-001			
TITULLI I VIZATIMIT		INSTALIMI I MATESIT TE UJIT INDIVIDUAL			
TITULLI I PROJEKTIT		"RRJETI SHPERNDARES PLOTESUES I UJESJELLESIT TE QYTETIT DELVINE"			
		SHOQERIA RAJONALE UJESJELLES KANALIZIME SARANDE sha			
					
PERGATITUR NGA:		"EBS" shpk			
					