

SEKSIONI 2-2


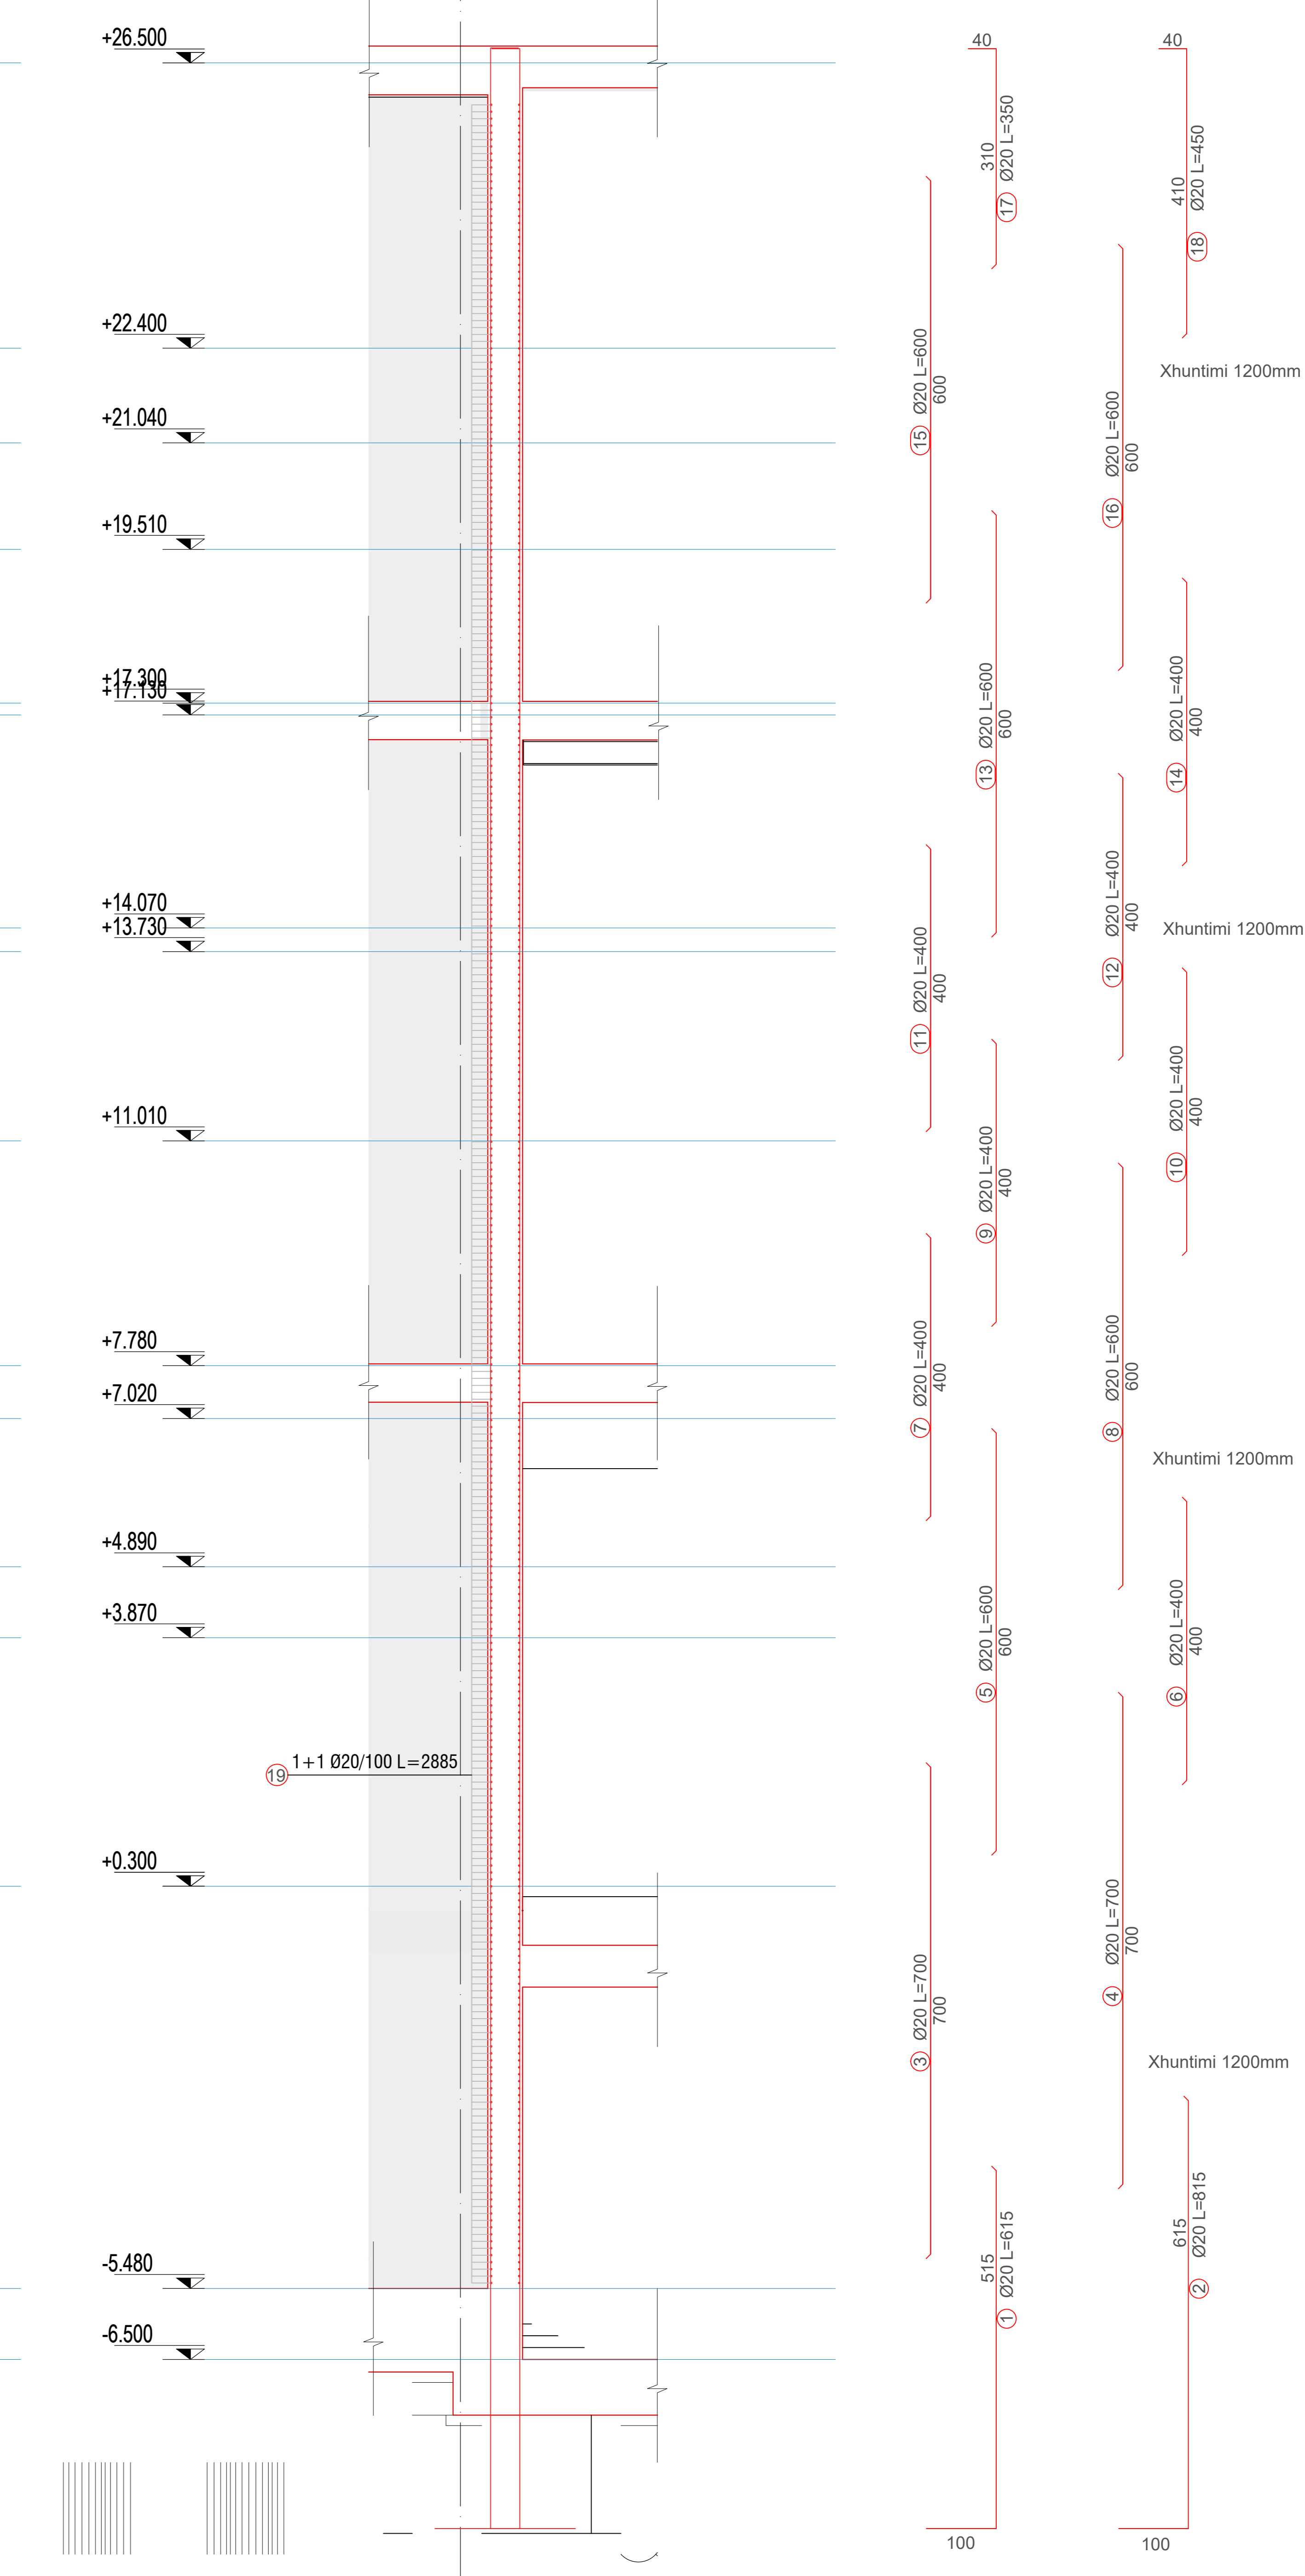


TABELA E HEKURIT

REINFORCEMENT TABLE OF WALLS
TABELA E ARMIMIT TE MUREVE

No. Position	Diameter	Length	Quantity	Total Length	Total Reinforcement / Armimi total			
					Diameter	Total Length	Steel Weight	Total Weight
Nr. Pozicioni	[mm]	[cm]	[pieces]	[m]	Diametri [mm]	Gjatesia tot. [m]	Pesha e shufres [kg/m]	Pesha tot. [ton]
1	20	600	40	240.00	20	3931.20	2.466	9.695
2	20	800	40	320.00				
3	20	700	40	280.00				
4	20	700	40	280.00				
5	20	600	40	240.00				
6	20	400	40	160.00				
7	20	400	40	160.00				
8	20	600	40	240.00				
9	20	400	40	160.00				
10	20	400	40	160.00				
11	20	400	40	160.00				
12	20	400	40	160.00				
13	20	400	40	160.00				
14	20	400	40	160.00				
15	20	600	40	240.00				
16	20	600	40	240.00				
17	20	350	40	140.00				
18	20	450	40	180.00				
19	20	628	40	251.20				
Total length				3931.20				

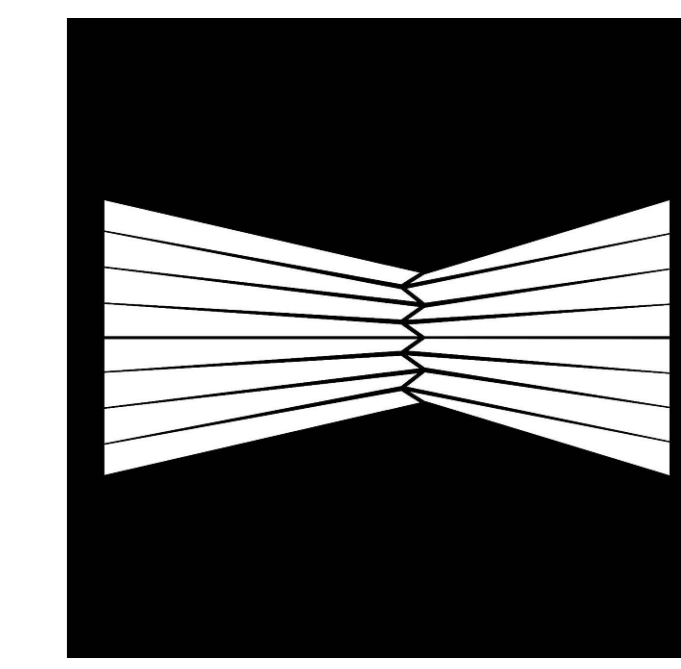

A&E ENGINEERING sh.p.k.

Studio Konsulente
F&M INGENIERIA S.p.a.
Via Belvedere 8/10
30035 Mirano (VE)
tel 041-5785711
fax 041-4359933

P. KAJMAKU	
Q. ZOTO	
M. HALILAJ	
E. CANO	
V. HOZHA	
D. BLAZ	
E. CANO	
N. DASHI	
V. AVDA	
V. HOZHA	
A. BONAVENTURA	
A. C. NIZZO	
G. CHARALAMPOPOULOS	
A. MAGRINI	

PROJEKT "Godina e Teatrit Tiranë", Faza I-rë

PROJEKTI KONSTRUKTIV

EMERTIMI Armimi i Murit

S-50_19

DATA: 01/11/2019 SHKALLA: 1:100