
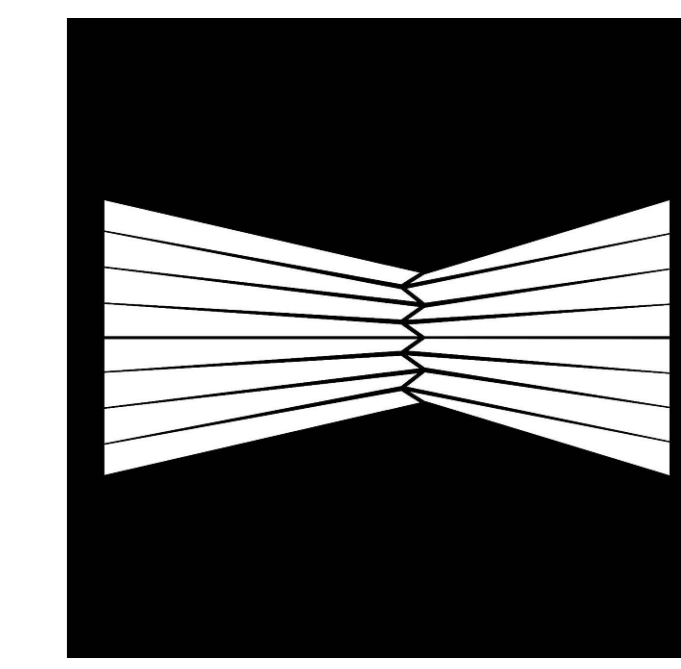
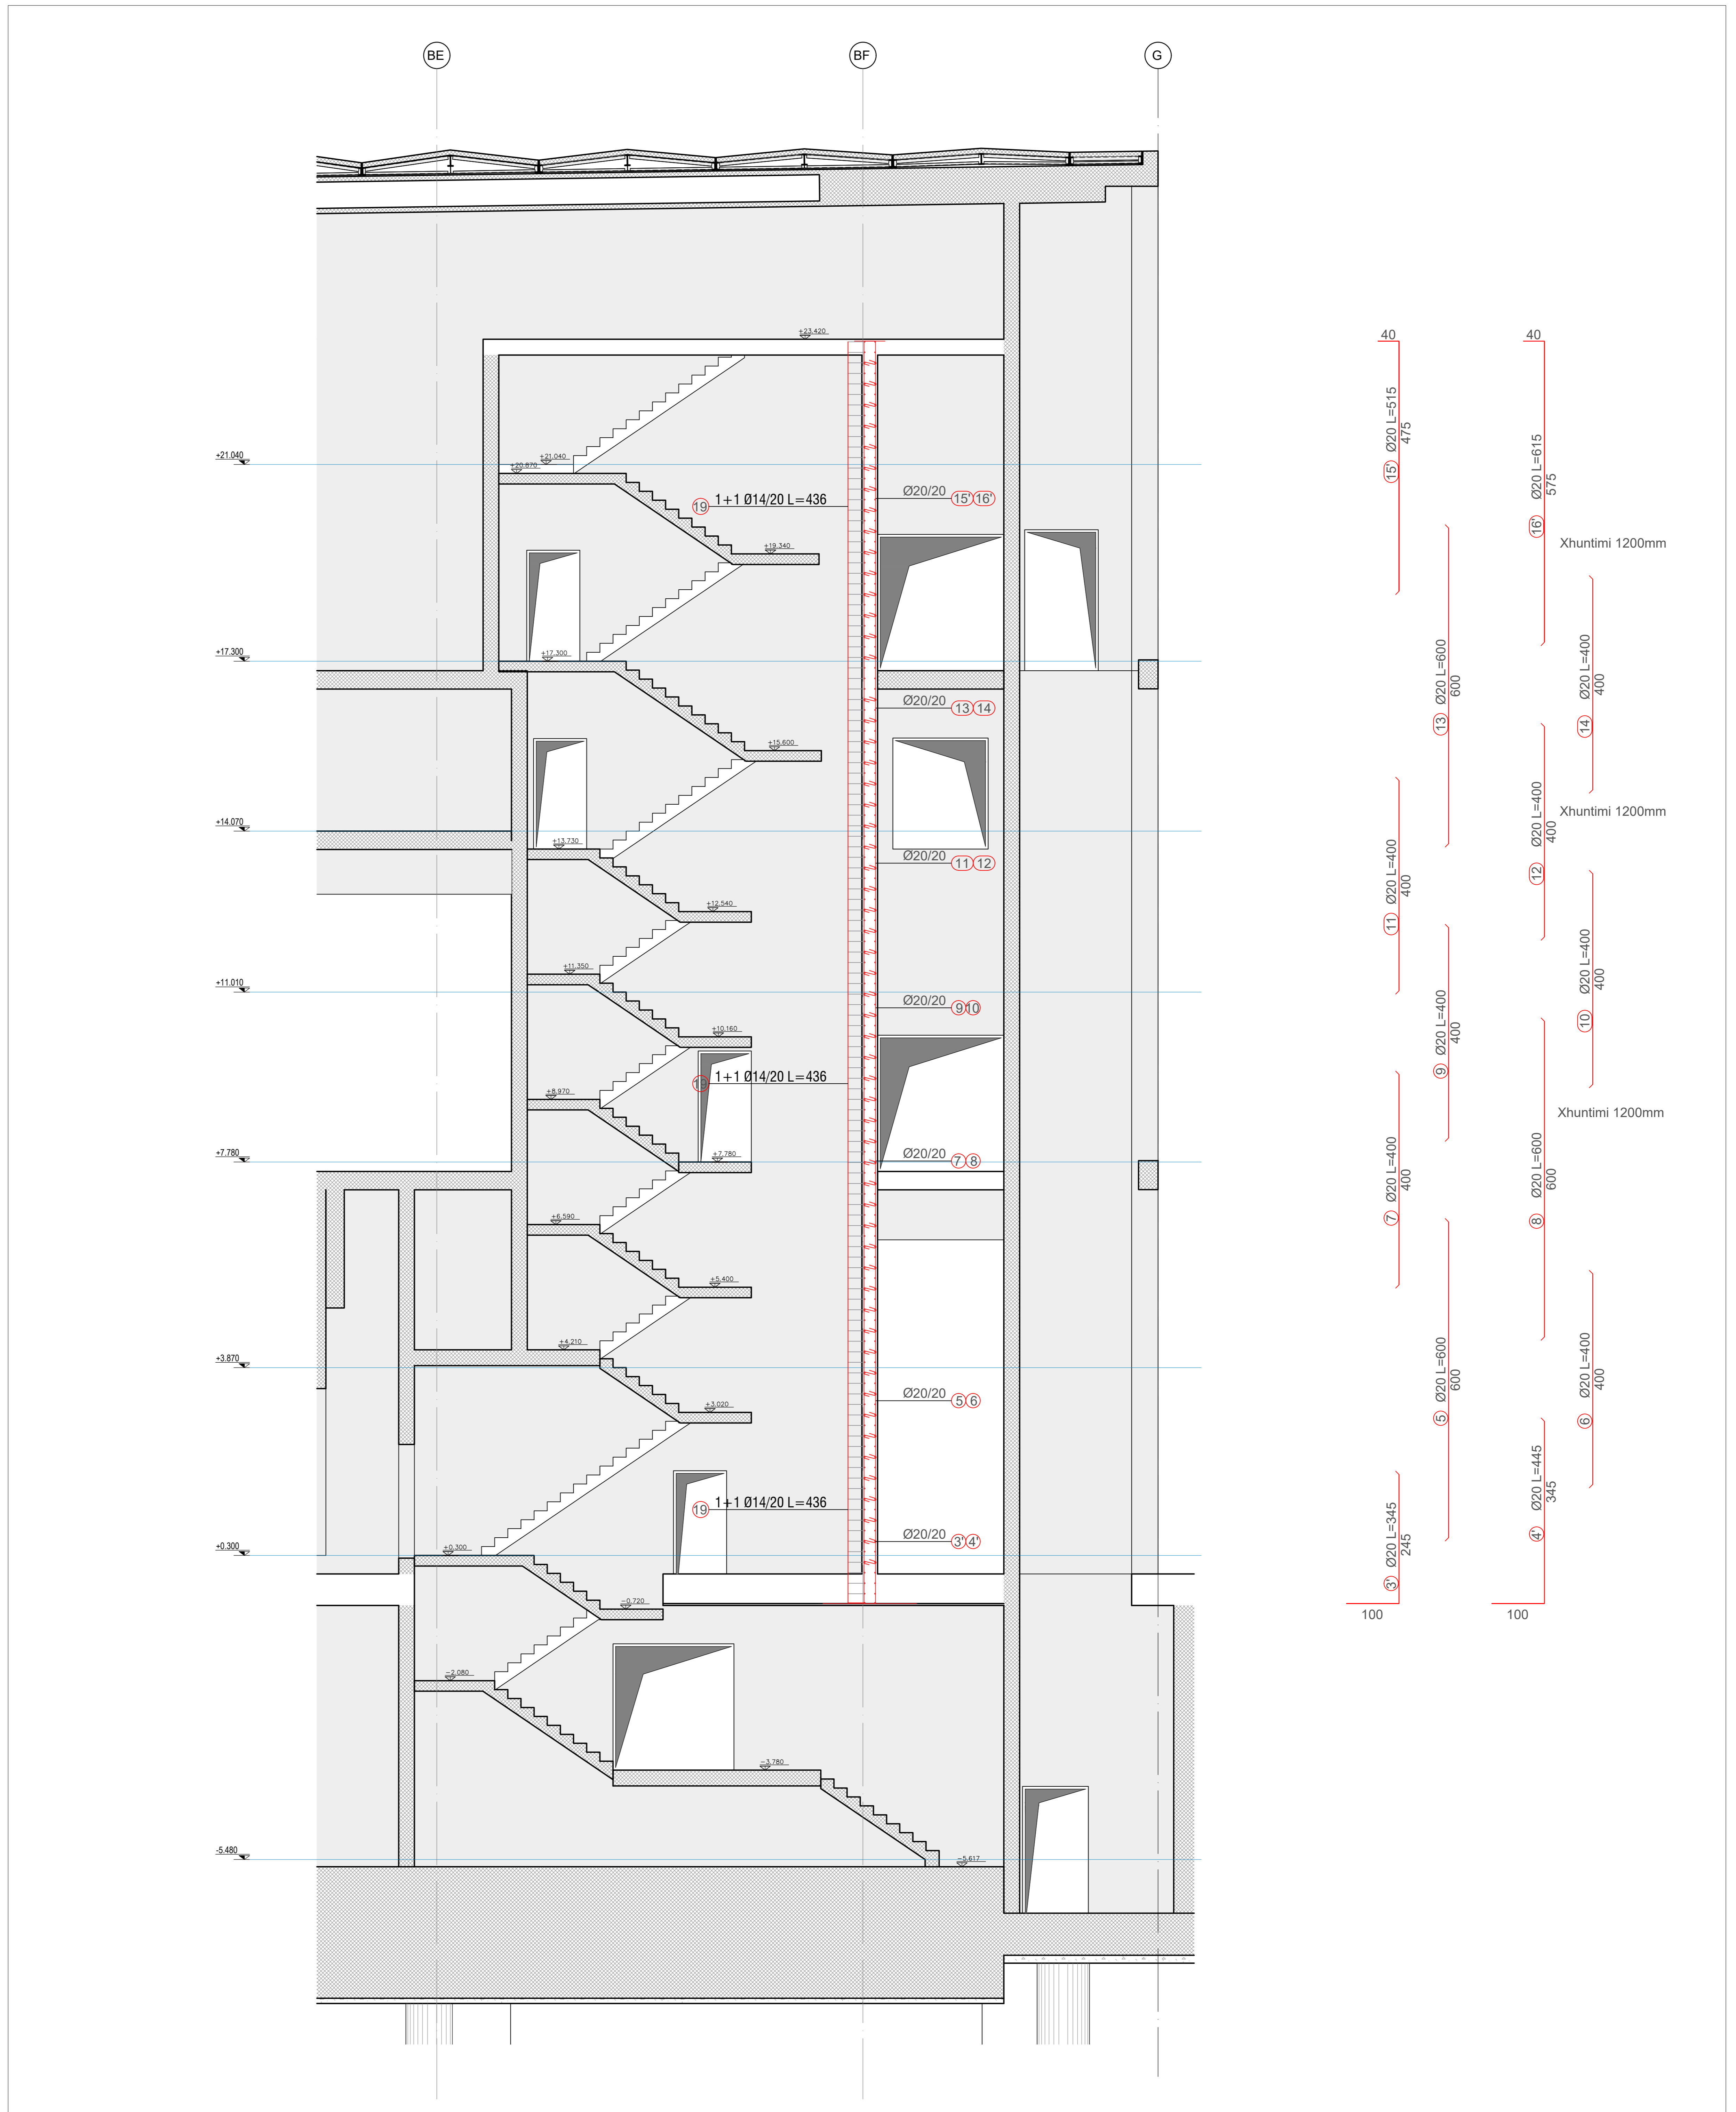


TABELA E HEKURIT

REINFORCEMENT TABLE OF WALLS TABELA E ARMIMIT TE MUREVE								
No. Position Nr. Pozicioni	Diameter Diametri [mm]	Length Gjatesia [cm]	Quantity Sasia [pieces]	Total Length Gjatesia tot. [m]	Total Reinforcement / Armimi total			
					Diameter Diametri [mm]	Total Length Gjatesia tot. [m]	Steel Weight Pesha e shufres [kg/m]	Total Weight Pesha tot. [ton]
3'	20	345	22	75.90	20	1369.20	2.466	3.377
4'	20	445	20	89.00	14	1046.40	1.208	1.264
5	20	600	22	132.00	Total Σ = 4.641			
6	20	400	20	80.00				
7	20	400	22	88.00				
8	20	600	20	120.00				
9	20	400	22	88.00				
10	20	400	20	80.00				
11	20	400	22	88.00				
12	20	400	20	80.00				
13	20	600	22	132.00				
14	20	400	20	80.00				
15'	20	515	22	113.30				
16'	20	615	20	123.00				
19	14	436	240	1046.40				
Total length				2415.60				

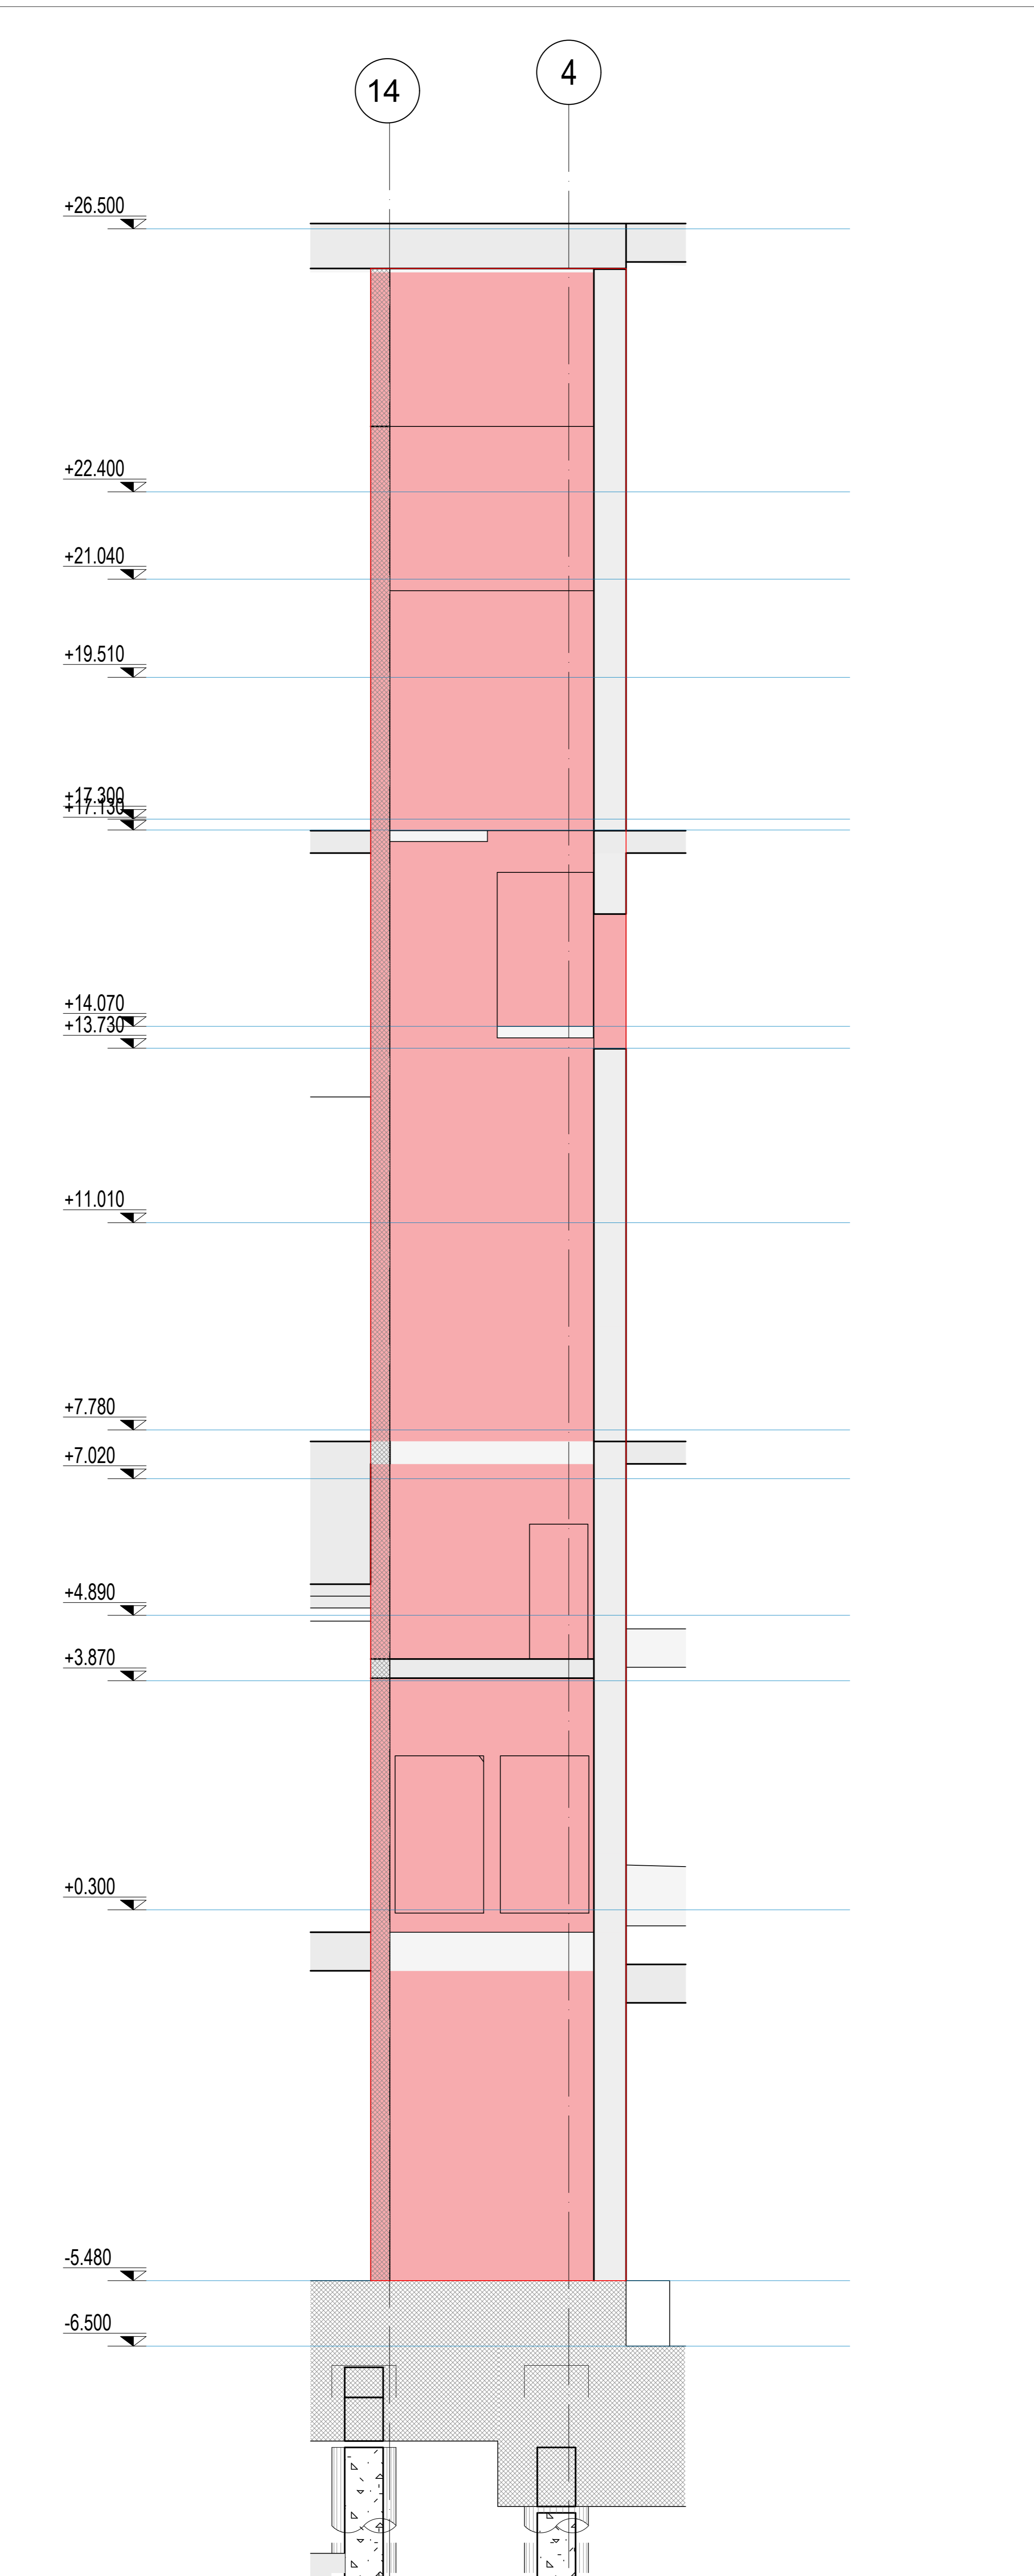

A&E ENGINEERING
A&E ENGINEERING sh.p.k

F&M ingegneria
Studio Konsulente
F&M INGEGNERIA S.p.a.
Via Belvedere 8/10
30035 Mirano (VE)
tel 041-5785711
fax 041-4355933

PROJEKT	P. KAJMAKU	
	Q. ZOTO	
	M. HALILAJ	
	E. CANO	
	V. HOZHA	
	D. BLET	
	E. CANO	
	N. DASHI	
gjetur	V. AJDA	
	V. HOZHA	
	A. BONAVENTURA	
	A. C. NUZZO	
	G. CHARALAMPOPOULOS	
	A. MAGRIN	

"Godina e Teatrit Tiranë", Faza I-rë

PROJEKTI KONSTRUKTIV

EMERTIMI
Armimi i Murit ne Seksionin B-B
Blloku B i shkalleve

S-50_6

DATA: _____ SHKALLA: Fik. 1:50