

## TECHNICAL REPORT (DESCRIPTIVE REPORT)

Performance-based routine maintenance, "Cereneci Bridge- Klenjë,Trebisht-Customs, Bualli Pass-Kraste, Lapidari Turn-Lis, National Road Intersection-Ulez " 62 km

- **Scope of services to be carried out:**

The services to be provided include all the activities, physical and others, which should be carried out by the contractor by their compliance with the levels of service, based on the implementation of all technical specifications.

In particular, they include managerial duties and physical works related to the following categories of works:

- Asphalt
- Leveling of shoulders
- Repair and upgrade of vertical and horizontal signs (and lighting, if any)
- Drainage facilities (ditches, gutters, culverts, etc.)
- Vegetation control
- Escarpments (leveling and removal of vegetation.)
- Control, repair and maintenance of art works
- Repair and upgrade of guardrails or concrete parapets
- Traffic management during execution of works
- Snow removal (if winter maintenance is available)

The services required by road maintenance are classified in the following categories of works:

- **Routine Maintenance Services** in the form of quantity expressed in a monthly ceiling amount (this will be a monthly quantity applicable throughout the contract duration, expressed in price per km for each month multiplied by road length and duration of services).
- **Rehabilitation Works** in the form of quantity of a ceiling amount, while indicating the quantities of measurable works to be carried out in order for the road to meet its performance standards.
- **Emergency Works** in the form of a traditional bill of quantities.

*The main functions of maintenance bases in general should be as follows:*

1. Supervision of road segment/section in certain periods by levels of service.
2. Monitoring of meteorological factors and undertaking measures depending on the situation.
3. Maintenance on desired road layers conditions.
4. Maintenance of parking spaces, service, road signs, lighting systems, and future signaling and telecommunication.
5. Repairs and reconstruction after road accidents.
6. Repairs and reconstruction after natural disasters.

7. Cleaning operations of drains, culverts and other facilities related to the removal of water from road surface.

8. All the operations for the cleaning and maintenance of:

- road signs, safety devices (guardrails, parapets, etc.) and lighting system
- local repair of sidewalk damages
- vegetation protection
- winter activities for the removal of snow and ice.

*Winter maintenance works (if any) include:*

1. Preliminary works before winter
2. Organization of materials (salt and vehicles) storage locations
3. Protective measures for snow, ice, snow piles and avalanches
4. Organization for 24 information reporting to 24 competent bodies.

• **Segments to be covered by the contract:**

No.	Segment name	Start coordinates	End coordinates	Length	Width
				km	ml
1	Cereneci Bridge - Klenjë	41.520911, 20.417945	41.360350, 20.462936	31.1	5
2	Trebisht-Customs	41.411442, 20.535436	41.433763, 20.540280	3.3	6
3	Bualli Pass - Kraste	41.481966, 20.195507	41.422566, 20.205052	16.4	6
4	Lapidari Turn-Lis	41.642002, 20.011452	41.627753, 20.091761	8.9	6
5	National Road Intersection-Ulez	41.667208, 19.883937	41.682636, 19.893858	2.3	6
<b>CONTRACT 2 TOTAL SUM</b>				<b>62</b>	

• **Specific condition**

For each case, the segments to be included in investment (reconstruction) or other projects of the Albanian Road Authority will be reduced from the contract.

• **Road signs and safety**

The maintenance of road signs and safety (guardrails) will be focused on repair and upgrade of the existing one.

• **Description of the area where the road is located**

**Cereneci Bridge – Klenjë 31.1 km**

This road segment is part of the connecting road between the city of Peshkopia and Librazhd.


It is an unpaved segment with one carriageway (width 5 ml).

The side ditches and culverts need partial cleaning.

The road signs and safety need further completion and ongoing maintenance.

The road lies in a highly mountainous terrain and is subject to winter maintenance.

The required level of service is “good”.

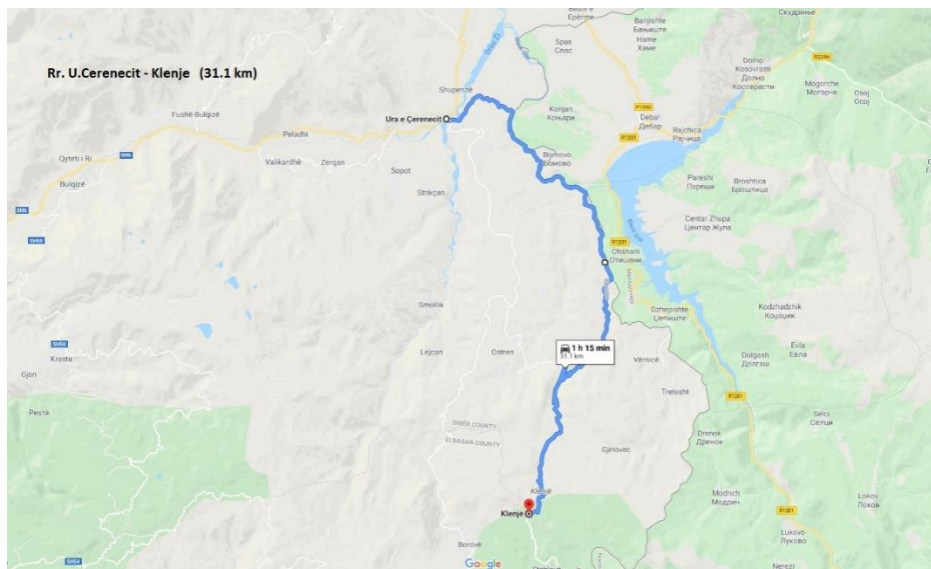

### **Trebisht-Customs 3.3 km**


The asphalt layers' conditions are averagely good.

The side ditches and culverts need partial cleaning.

The road signs and safety need further completion and ongoing maintenance.

The road lies in a highly mountainous terrain and is subject to winter maintenance.

The required level of service is "good".

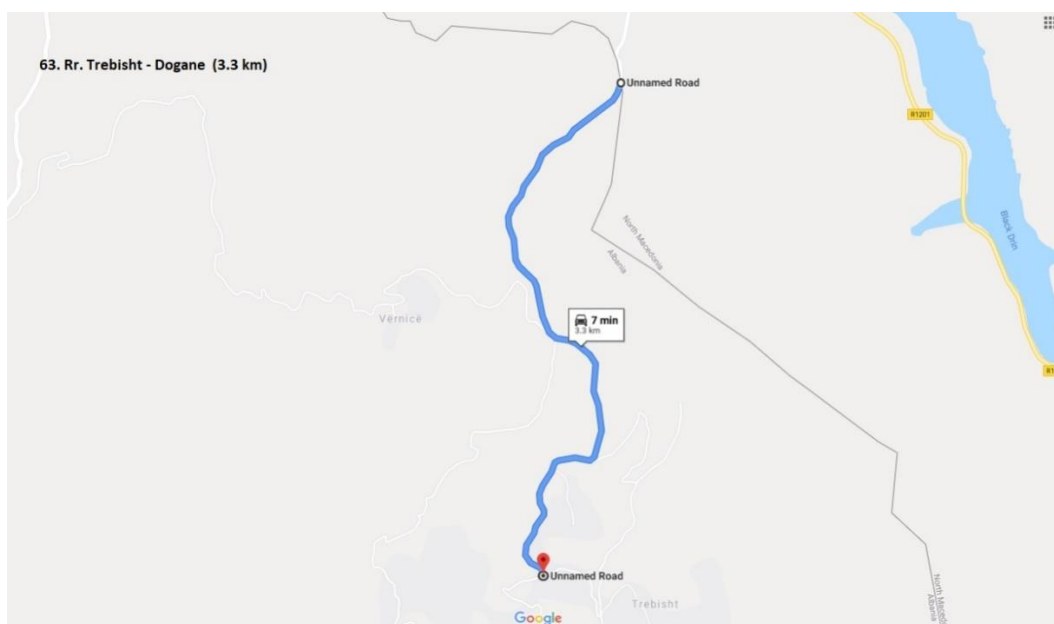

### **Bualli Pass - Kraste 16.4 km**


The asphalt layers' conditions are poor.

The side ditches and culverts need partial cleaning.

The road signs and safety need further completion and ongoing maintenance.

The road lies in a highly mountainous terrain and is subject to winter maintenance.

The required level of service is "good".

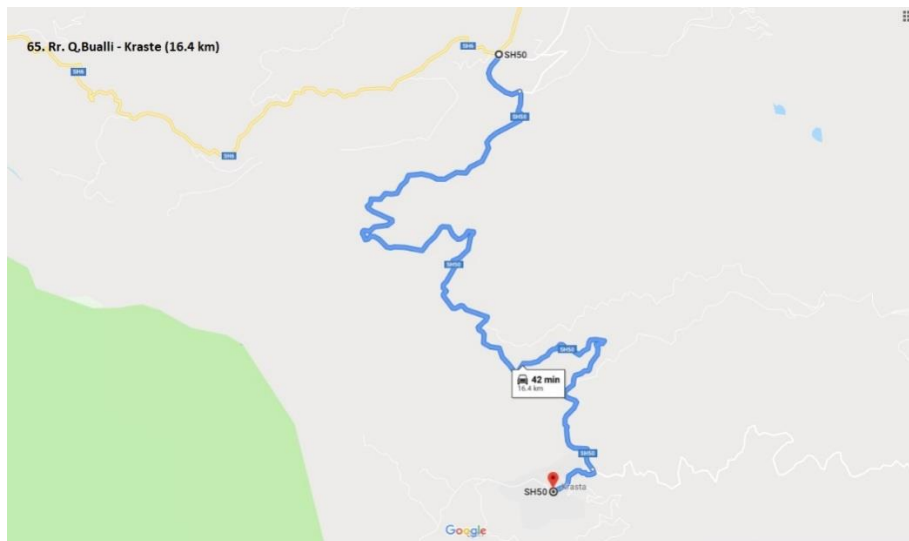

### **Lapidari Turn-Lis 8.9 km**


The asphalt layers' conditions are good.

The side ditches and culverts need partial cleaning.

The road signs and safety need further completion and ongoing maintenance.

The road lies in a highly mountainous terrain and is subject to winter maintenance.

The required level of service is "good".

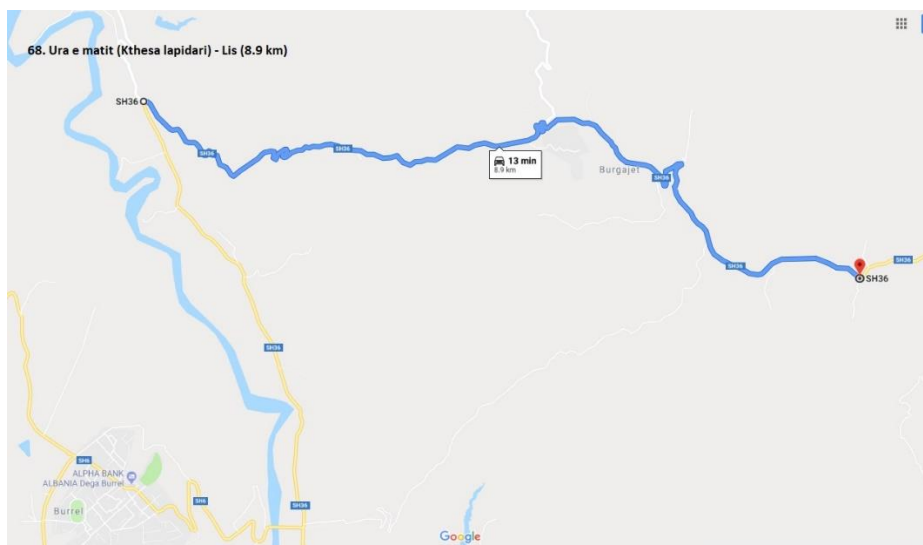

### **National Road Intersection-Ulez 2.3 km**


The asphalt layers' conditions are good.

The side ditches and culverts need partial cleaning.

The road signs and safety need further completion and ongoing maintenance.

The road lies in a highly mountainous terrain and is subject to winter maintenance.

The required level of service is "good".

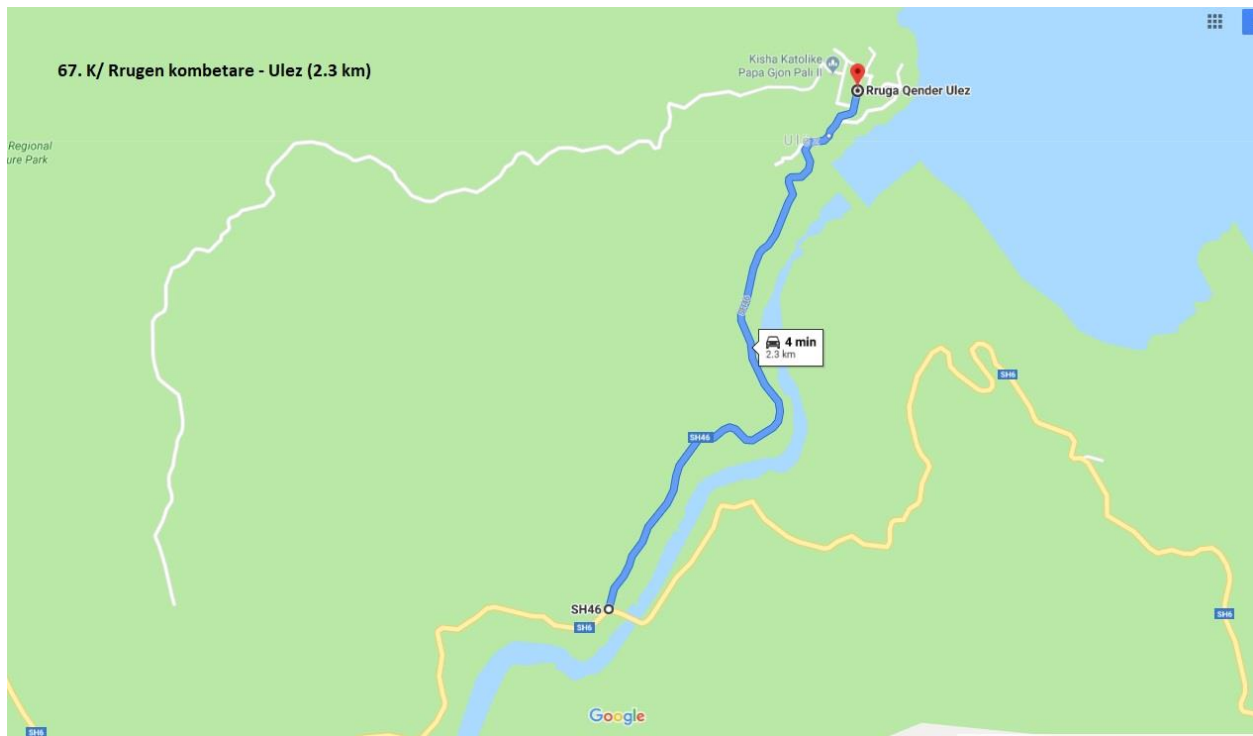

WORKING GROUP:

Eng \_\_\_\_\_ Eng \_\_\_\_\_ Eng \_\_\_\_\_