


PREVENTIVI I PUNIMEVE PA CMIME

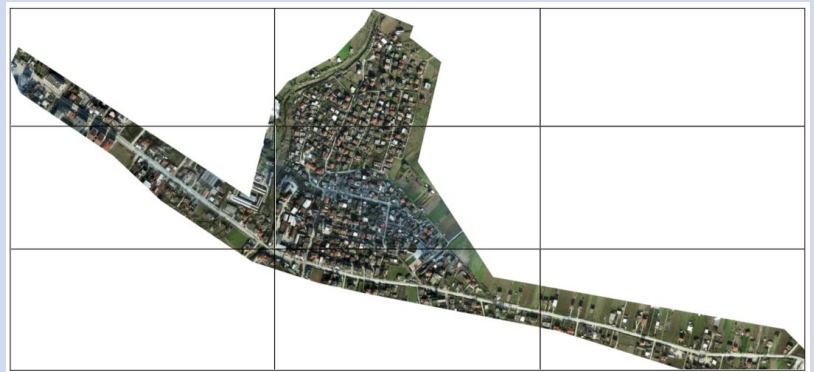

OBJEKTI:

**“NDERTIMI I RRJETIT TE RI TE KANALIZIMEVE TE
UJRAVE TE ZEZA TE LAGJES UZNOV, RAJONI NR.3,
BASHKIA BERAT”**

**POROSITES:
BASHKIA BERAT**

**PROJEKTUES:
B.O.E: “KKG Project” sh.p.k. & “GR
Albania” sh.p.k. & “NET- GROUP” sh.p.k**

PREVENTIVI I PUNIMEVE

OBJEKTI: " NDERTIMI I RRJETIT KUZ NE LAGJEN UZNOVE, BASHKIA BERAT "

| NR. | ANALIZE | EMERTIMI I PUNIMEVE | NJESIA | SASIA | CMIMI | VLERA (LEKE) | |
|---|------------|---|--------|-------|------------------|--------------|---|
| I - PUNIME PRISHJE | | | | | | | |
| 1 | 3.2 | Prerje bime te vogla ø-10cm | m2 | 1700 | | - | |
| 2 | 3.3 | Prerje e sistemim pemesh ø 10 - 20 cm | cope | 12 | | - | |
| 3 | 4.190 | Prerje shtrese asfalti ekzistues me makineri | ml | 6090 | | - | |
| 4 | 3.969 | Skarifikim shtrese asfalti me makineri tmes=6cm | m2 | 3015 | | - | |
| 5 | An.1-1 | Heqje pllaka trotuari | m2 | 1040 | | - | |
| 6 | An.1-2 | Prerje shtrese betoni nen trotuar me makineri | ml | 1730 | | - | |
| 7 | 2.426/3 | Prishje shtresa betoni | m3 | 62 | | - | |
| 8 | 3.405/1 | Prishje struktura prej betoni (puseta ekzistuese) | m3 | 125 | | - | |
| 9 | An.1-3 | Prishje rrjetit ekzistues | ml | 2641 | | - | |
| 10 | 3.158/5a | Transport me auto deri 5.0 km | m3 | 431 | | - | |
| | | | | | SHUMA I | | - |
| II - GERMIME DHE MBUSHJE KANALI PER TUBACIONET | | | | | | | |
| 1 | 3.89/a | Germim dheu me ekskavator goma 0.25 m³, ne kanale gjeresi deri 2 m, toke zak, kategoria III, me shk ne mjet | m3 | 9872 | | - | |
| 2 | 3.87/a | Germim dheu me ekskavator goma 0.25 m³, ne kanale gjeresi deri 2 m, toke zak, kategoria III, me shk ne toke | m3 | 9938 | | - | |
| 3 | 3.45/1 | Germim kanalesh ne toke te zakonshme, me krahe, me seksion deri 0.75 m² | m3 | 655 | | - | |
| 4 | 2.261 | Shtrese rere per tubacionet | m3 | 2100 | | - | |
| 5 | An.2-1 | Mbushje me material te germuar, perhapur e ngjeshur me makineri ne tokat vegjetale | m3 | 9937 | | - | |
| 6 | 3.211 | Shtrese çakelli mbeturine kave t=20cm, perhapur e ngjeshur makineri | m2 | 9129 | | - | |
| 7 | 3.158/5a | Transport dheu me auto deri 5.0 km | m3 | 10498 | | - | |
| | | | | | SHUMA II | | - |
| III- PUNIME PER RIPARIM TE SHITRESAVE TE RRUGES DHE TROTUAREVE | | | | | | | |
| 1 | 2.258 | Nenshtrese zhavorri t=20cm | m3 | 201 | | - | |
| 2 | 2.262/3 | Shtrese betoni C 12/15(nen trotuar t=10cm) | m3 | 101 | | - | |
| 3 | An.3-1 | Vendosje pllaka trotuari | m2 | 1040 | | - | |
| 4 | 2.29 | Bordura trotuari 20x35cm te parapergatitura | ml | 78 | | - | |
| 5 | 3.211 | Shtrese çakelli mbeturine kave t=20cm, perhapur e ngjeshur makineri | m2 | 3015 | | - | |
| 6 | 3.212/c | Shtrese stabilizant t=10-15cm | m2 | 3015 | | - | |
| 7 | 3.222/2 | Shtrese binderi me granil gur kave, 6cm,me makineri | m2 | 3015 | | - | |
| 8 | 3.226/1 | Shtrese asfaltobetoni me granil guri kave, 4cm, me makineri | m2 | 3015 | | - | |
| | | | | | SHUMA III | | - |
| IV- TUBA TE BRINJEUAR HDPE | | | | | | | |
| 1 | An.4-1 | F V tuba te brinjezuar HDPE SN4 d=200 mm per lidhjet terciare me shtepite | ml | 9540 | | - | |
| 2 | An.4-2 | F V tuba te brinjezuar HDPE SN4 d= 250 mm | ml | 1665 | | - | |
| 3 | An.4-3 | F V tuba te brinjezuar HDPE SN4 d=315 mm | ml | 2689 | | - | |
| 4 | 3.An/1t | F V tuba te brinjezuar HDPE SN8 d=315 mm | ml | 3380 | | - | |
| 5 | 3.An/2t | F V tuba te brinjezuar HDPE SN8 d=400 mm | ml | 986 | | - | |
| 6 | 3.An/3t | F V tuba te brinjezuar HDPE SN8 d=500 mm | ml | 281 | | - | |
| 7 | 3.An/4t | F V tuba te brinjezuar HDPE SN8 d=600 mm | ml | 75 | | - | |
| 8 | 3.An/5t | F V tuba te brinjezuar HDPE SN8 d=800 mm | ml | 1005 | | - | |
| 9 | 4.60/1 | F.V. tuba celiku ø>200 te h/izoluar ne fabrike | ton | 2.92 | | - | |
| 10 | 4.141/a7.0 | F.V. shirit sinjalizimi | ml | 19621 | | - | |

| | | | | | | |
|---|----------|---|------|------|-------------------------|---|
| | | | | | SHUMA IV | - |
| V- GERMIME DHE MBUSHJE PER Pusetat | | | | | | |
| 1 | 3.59/b | Germim themel i vecuar, gropa sip.10-30 m ² , toke e zak. me h = 1.5 m | m3 | 3270 | | - |
| 2 | 2.258 | Nenshtrese zhavorri t=10cm (nen pusete) | m3 | 28 | | - |
| 3 | 2.262/1 | Shtrese betoni C 7/10 (nen pusete) | m3 | 28 | | - |
| 4 | 3.393/1 | Mbushje me zhavorr pas mureve pusetave | m3 | 1250 | | - |
| 5 | 3.158/5a | Transport dheu me auto deri 5.0 km | m3 | 3270 | | - |
| | | | | | SHUMA V | - |
| VI-PUSETAT | | | | | | |
| 1 | 2.599 | F.V. pusete shkarkimi 100x100, h=150, me kapak gize | cope | 18 | | - |
| 2 | 3.586 | Ndertim Pusete kontrolli b/a, Ø1.0 m, h=1.5 ÷2.0 m + kapak gize | cope | 2 | | - |
| 3 | 3.585 | Ndertim Pusete kontrolli b/a, Ø1 m, h=2.0÷2.5 m + kapak gize | cope | 1 | | - |
| 4 | 3.393 | Ndertim puseta betoni H=2.5-3m, D=1m + kapak gize | cope | 1 | | - |
| 5 | An.6-1 | Furnizim - Vendorsje puseta HDPE lartesi 1.0 - 1.5 m | cope | 243 | | - |
| 6 | An.6-2 | Furnizim - Vendorsje puseta HDPE lartesi 1.5 - 2.0 m | cope | 50 | | - |
| 7 | An.6-3 | Furnizim - Vendorsje puseta HDPE lartesi 2.0 - 2.5 m | cope | 23 | | - |
| 8 | An.6-4 | Furnizim - Vendorsje puseta HDPE lartesi 2.5 - 3.0 m | cope | 10 | | - |
| 9 | An.6-5 | Furnizim - Vendorsje puseta HDPE lartesi 3.0 - 3.5 m | cope | 2 | | - |
| 10 | 3.717 | Ndertim Pusete kryesore betoni 2x2 m kapak gize H=2.5-3.5 m | cope | 1 | | - |
| | | | | | SHUMA VI | - |
| | | | | | SHUMA I - VI | - |
| | | | | | Fondi rezerve 5% | - |
| | | | | | SHUMA | - |
| | | | | | T.V.SH. 20% | - |
| | | | | | TOTALI | - |

PROJEKTUES:

**B.O.E: “KKG Project” sh.p.k. & “GR Albania” sh.p.k.
& “NET- GROUP” sh.p.k**

Perfaqesues

Ing. Ardit Kane